

TECHNICAL GUIDE



STANDARD EFFICIENCY

SINGLE PACKAGE AIR CONDITIONERS AND SINGLE PACKAGE GAS/ELECTRIC UNITS

DM 078, 090, 102, 120 and 150
6-1/2, 7-1/2, 8-1/2, 10 and 12-1/2 NOMINAL TONS
9.0 EER



DESCRIPTION

YORK® Predator® units are convertible single packages with a common footprint cabinet and common roof curb for all 6-1/2 through 12-1/2 ton models. All units have two compressors with independent refrigeration circuits to provide two stages of cooling. The units were designed for commercial applications and can be easily installed on a roof curb, slab, or frame.

All Predator® units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged, wired, piped, and tested at the factory to provide a quick and easy field installation.

All units are convertible between side and down airflow. A independent economizer design is used on side and down discharge applications, as well as all tonnage sizes.

Predator® units are available in the following configurations: cooling only, cooling with electric heat, and cooling with gas heat. Electric heaters are available as factory-installed options or field-installed accessories.

Tested in accordance with:



TABLE OF CONTENTS

DESCRIPTION	1
FEATURES	3
FACTORY INSTALLED OPTIONS	5
FIELD INSTALLED ACCESSORIES	6
NOMENCLATURE	9
GUIDE SPECIFICATIONS	45

LIST OF FIGURES

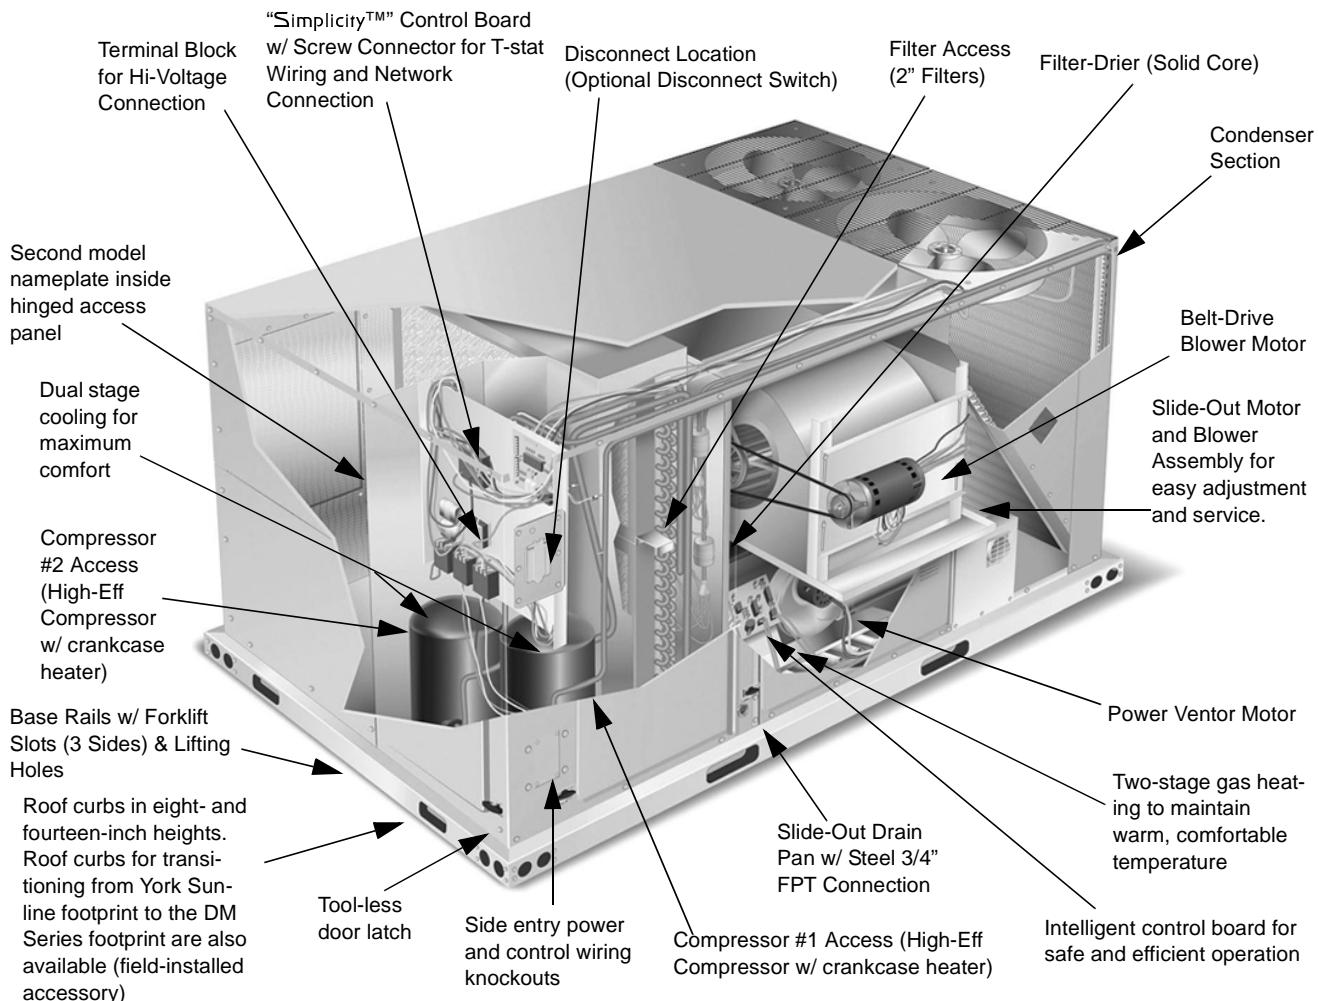
<u>Fig. #</u>	<u>Pg. #</u>
1 PREDATOR® COMPONENT LOCATION	3
2 POWER EXHAUST ACCESSORY DOWNFLOW APPLICATION	36
3 POWER EXHAUST ACCESSORY HORIZONTAL APPLICATION	37
4 UNIT 4 POINT LOAD	37
5 UNIT CENTER OF GRAVITY	37
6 UNIT 6 POINT LOAD	37
7 UNIT DIMENSIONS	38
8 PREDATOR® ROOF CURB DIMENSIONS	39
9 SUNLINE™ TO PREDATOR® TRANSITION ROOF CURBS	40
10 BOTTOM DUCT OPENINGS (FROM ABOVE)	40
11 REAR DUCT DIMENSIONS	41
12 COOLING UNIT WITH GAS HEAT WIRING 230 VOLT DIAGRAM	42
13 COOLING UNIT WITH/WITHOUT ELECTRIC HEAT WIRING DIAGRAM	43
14 COOLING UNIT WITH GAS HEAT WIRING 460, 575 VOLT AND 50 HZ DIAGRAM	44

LIST OF TABLES

<u>Tbl. #</u>	<u>Pg. #</u>
1 ACCESSORIES	8
2 PHYSICAL DATA	13
3 DM CAPACITY RATINGS	14
4 UNIT VOLTAGE LIMITATIONS	14
5 COOLING CAPACITY 6-1/2 TON UNIT	15
6 COOLING CAPACITY 7-1/2 TON UNIT	16
7 COOLING CAPACITY 8-1/2 TON UNIT	17
8 COOLING CAPACITY 10 TON UNIT	18
9 COOLING CAPACITY 12-1/2 TON UNIT	19

LIST OF TABLES (cont.)

<u>Tbl. #</u>	<u>Pg. #</u>
10 ELECTRICAL DATA DM078 (6-1/2 TON) STD EFFICIENCY W/O PWRD CONV. OUTLET	20
11 ELECTRICAL DATA DM078 (6-1/2 TON) STD EFFICIENCY WITH PWRD CONV. OUTLET	20
12 ELECTRICAL DATA DM090 (7-1/2 TON) STD EFFICIENCY W/O PWRD CONV. OUTLET	21
13 ELECTRICAL DATA DM090 (7-1/2 TON) STD EFFICIENCY WITH PWRD CONV. OUTLET	21
14 ELECTRICAL DATA DM102 (8-1/2 TON) STD EFFICIENCY W/O PWRD CONV. OUTLET	22
15 ELECTRICAL DATA DM102 (8-1/2 TON) STD EFFICIENCY WITH PWRD CONV. OUTLET	22
16 ELECTRICAL DATA DM120 (10 TON) STD EFFICIENCY W/O PWRD CONV. OUTLET	23
17 ELECTRICAL DATA DM120 (10 TON) STD EFFICIENCY WITH PWRD CONV. OUTLET	23
18 ELECTRICAL DATA DM150 (12-1/2 TON) STD EFFICIENCY W/O PWRD CONV. OUTLET	24
19 ELECTRICAL DATA DM150 (12-1/2 TON) STD EFFICIENCY W/PWRD CONV. OUTLET	24
20 ELECTRIC HEAT MULTIPLIERS	24
21 BLOWER PERF. 6-1/2 TON SIDE DUCT	25
22 BLOWER PERF. 7-1/2 TON SIDE DUCT	26
23 BLOWER PERF. 8-1/2 TON SIDE DUCT	27
24 BLOWER PERF. 10 TON SIDE DUCT	28
25 BLOWER PERF. 12-1/2 TON SIDE DUCT	29
26 BLOWER PERF. 6-1/2 TON DOWNSHOT	30
27 BLOWER PERF. 7-1/2 TON DOWNSHOT	31
28 BLOWER PERF. 8-1/2 TON DOWNSHOT	32
29 BLOWER PERF. 10 TON DOWNSHOT	33
30 BLOWER PERF. 12-1/2 TON DOWNSHOT	34
31 ADDITIONAL STATIC RESISTANCE	35
32 ELECTRIC HEAT MINIMUM SUPPLY AIR CFM	35
33 INDOOR BLOWER SPECIFICATIONS	36
34 POWER EXHAUST SPECIFICATIONS	36
35 4 POINT LOAD WEIGHT	37
36 6 POINT LOAD WEIGHT	38
37 UNIT WEIGHT	38
38 UNIT CLEARANCES	38

**FIGURE 1 - PREDATOR® COMPONENT LOCATION**

FEATURES

- Standard Efficiency**— All standard efficiency units have a minimum EER of 9.0. Gas/electric units have electronic spark ignition and power vented combustion with steady state efficiencies of 80%.
- Service Friendly** – The Predator® incorporates a number of enhancements which improve serviceability.

The motor and blower slide out of the unit as a common assembly. This facilitates greater access to all the indoor airflow components, thus simplifying maintenance and adjustment.

Service time is reduced through the use of hinged, tool-less panels. Such panels provide access to frequently inspected components and areas, including the control box, compressors, filters, indoor motor & blower, and the heating section. The panels are screwed in place at the factory to prevent access by children or other unauthorized persons. It is recommended that the panels be secured with screws once service is complete.

Service windows have been placed in both condenser section walls. Rotation of the cover allows easy access to the condenser coils for cleaning or inspection.

Both the unit control board and ignition control board utilize flash codes to aid in diagnosis of unit malfunctions. Unique alarm codes quickly identify the source of the unit alarm.

All units use the same standard filter size. This standardization removes any confusion on which filter sizes are needed for replacement.

The non-corrosive drain pan slides out of the unit to permit easy cleaning. The drain pan is accessed by removing the drain pan cover plate on the rear of the unit. Once the plate is removed, the drain pan slides out through the rear of the unit.

All Predator® units have a second model nameplate located inside the control access door. This is to prevent deterioration of the nameplate through weathering.

- **Environmentally Aware** – For improved Indoor Air Quality, foil faced insulation is used exclusively throughout the units.
 - **Balanced Heating** – The Predator® offers “Ultimate Heating Comfort” with a balance between 1st and 2nd stage gas heating. The 1st stage of a gas heat Predator® unit provides 60% of the heating capacity. Balanced heating allows the unit to better maintain desired temperatures.
 - **Convertible Airflow Design** – The side duct openings are covered when they leave the factory. If a side supply/return is desired, the installer simply removes the two side duct covers from the outside of the unit and installs them over the down shot openings. No panel cutting is required. Convertible airflow design allows maximum field flexibility and minimum inventory.
 - **System Protection** - Suction line freezestats are supplied on all units to protect against loss of charge and coil frosting when the economizer operates at low outdoor air temperatures while the compressors are running. Every unit has solid-core liquid line filter-driers and high and low-pressure switches. Internal compressor protection is standard on all compressors. Crankcase heaters are standard on reciprocating compressors. Scroll compressors do not require crankcase heaters. Phase Monitors are standard on units with scroll compressors. This accessory monitors the incoming power to the unit and protects the unit from phase loss and reversed phase rotation.
 - **Advanced Controls** - Simplicity™ control boards have standardized a number of features previously available only as options or by utilizing additional controls.
 - **Low Ambient** - An integrated low-ambient control allows all units to operate in the cooling mode down to 0°F outdoor ambient without additional assistance. Optionally, the control board can be programmed to lockout the compressors when the outdoor air temperature is low or when free cooling is available.
 - **Anti-Short Cycle Protection** - To aid compressor life, an anti-short cycle delay is incorporated into the standard controls. Compressor reliability is further ensured by programmable minimum run times. For testing, the anti-short cycle delay can be temporarily overridden with the push of a button.
 - **Fan Delays** - Fan on and fan off delays are fully programmable. Furthermore, the heating and cooling fan delay times are independent of one another. All units are programmed with default values based upon their configuration of cooling and heat.
 - **Safety Monitoring** - The control board monitors the high and low-pressure switches, the freezestats, the gas valve, if applicable, and the temperature limit switch on gas and electric heat units. The unit control board will alarm on ignition failures, compressor lockouts and repeated limit switch trips.
 - **Nuisance Trip Protection and Strikes** - To prevent nuisance trouble calls, the control board uses a “three times, you’re out” philosophy. The high and low-pressure switches and the freezestats must trip three times within two hours before the unit control board will lock out the associated compressor.
 - **On Board Diagnostics** - Each alarm will energize a trouble light on the thermostat, if so equipped, and flash an alarm code on the control board LED. Each high and low-pressure switch alarm as well as each freezestat alarm has its own flash code. The control board saves the five most recent alarms in memory, and these alarms can be reviewed at any time. Alarms and programmed values are retained through the loss of power.
 - **Reliable** – From the beginning – All units undergo computer automated testing before they leave the factory. Units are tested for refrigerant charge and pressure, unit amperage, and 100% functionality. For the long term – All Predator® units are painted with a long lasting, powder paint that stands up over the life of the unit. The paint used has been proven by a 750 hour salt spray test.
 - **Flexible Placement** – All models and configurations share the same cabinet/footprint and thus the same roof curb. You have the flexibility to set one curb and choose the correct tonnage size and heating option after the internal loads have been determined.
- To further simplify planning and installation, Predator® cabinets are designed to fit your roof. With the optional roof curb, the unit ductwork is designed to fit around 24" on-center joists or between 48" on-center joists.
- The drain pan can be rotated to drain to either the front or the rear of the unit. Additionally, the drain pan can be piped to drain through the roof curb. As it is sometimes difficult to have a level installation, the drain pan features a generous slope to ensure proper drainage.
- **Full Perimeter Base Rails** – The permanently attached base rails provide a solid foundation for the entire unit and protect the unit during shipment. The rails offer forklift access from 3 sides, and rigging holes are available so that an overhead crane can be used to place the units on a roof.
 - **Easy Installation** – Gas and electric utility knockouts are supplied in the unit underside as well as the side of the unit. A clearly identified location is provided to mount a field supplied electrical disconnect switch. Utility connections can be made quickly and with a minimum amount of field labor.
- All units are shipped with 2" filters installed.
- **Wide Range of Indoor Airflows** – All indoor fan motors are belt-drive type providing maximum flexibility to handle most airflow requirements. For high static applications, factory installed alternate indoor fan motors are available. With the optional indoor fan motor, all units can supply nominal airflow at a minimum of 1.5" ESP.

- **Warranty** - All models include a 1-year limited warranty on the complete unit. Compressors and electric heater elements each carry a 5-year warranty. Aluminized steel and stainless steel tubular heat exchangers carry an additional 10-year warranty.

FACTORY INSTALLED OPTIONS

YORK® offers several equipment options factory installed, for the Predator® line.

- **Downflow Economizer - (With barometric relief)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type, and is shipped installed and wired. The installer needs only to assemble and mount the outdoor air hood (Provided). The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.
- **Horizontal Economizer - (Without barometric relief)** - All features of the downflow economizer exist except you must order the duct mount barometric relief separately. **You must order a 1EH0408 if you are installing a power exhaust. You can order a 1RD0411 Barometric Relief for horizontal flow economizers only.**
- **BAS Ready Economizer -(With barometric relief)** - The economizer is provided with a Belimo actuator that requires a 0-10V DC input from an external source (i.e., field installed building automation system controller). Power exhaust options are available. The economizer is 2% low leakage type with spring return and fully modulating dampers capable of introducing up to 100% outside air. Also include 2" pleated filters.
- **Slab Economizer for Energy Recovery Ventilators- (With barometric relief and Fresh Air Hood)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type, and is shipped installed and wired. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation.
- With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible.
- **Power Exhaust (Downflow only)** - This accessory installs in the unit with a down flow economizer.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.
- **Alternate Indoor Blower Motor** - For applications with high static restrictions, units are offered with optional indoor motors that provide higher static output and/or higher airflow, depending upon the installer's needs.
- **Aluminized Steel Gas Heat Exchanger** - For applications in non-corrosive environments.
- **Stainless Steel Gas Heat Exchanger** - For applications in corrosive environments, this option provides a full stainless steel heat exchanger assembly.
- **Stainless Steel Drain Pan** - An optional rust-proof stainless steel drain pan is available to provide years of trouble-free operation in corrosive environments.
- **Electric Heaters** - The electric heaters range from 9kW to 54kW and are available in all the voltage options of the base units. All heaters are dual staged. All heaters are intended for single point power supply.
- **Disconnect Switch** - For gas heat units and cooling units with electric heat, an HACR breaker sized to the unit is provided. For cooling only units, a switch sized to the largest electric heat available for the particular unit is provided. Factory installed option only.
- **Convenience Outlet - (Non-Powered /Powered)** - This option locates a 120V single-phase GFCI outlet with cover, on the corner of the unit housing adjacent to the compressors. The "Non-powered" option requires the installer to provide the 120V single-phase power source and wiring. The "Powered" option is powered by a step-down transformer in the unit. Factory installed option only.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment. Available for both the supply and/or return air.
- **Phase Monitors** - Designed to prevent unit damage. The phase monitor will shut the unit down in an out-of phase condition. **(Standard on units with Scroll Compressors.)**

- **Coil Guard** - Customers can purchase a coil guard kit to protect the condenser coil from damage. Additionally, this kit stops animals and foreign objects from entering the space between the inner condenser coil and the main cabinet. This is not a hail guard kit.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters. Factory installed option or field installed accessory.
- **Technicoat Condenser Coils** - The condenser coils are coated with a phenolic coating for protection against corrosion due to harsh environments.
- **Technicoat Evaporator Coil** - The evaporator coils are coated with a phenolic coating for protection against corrosion due to harsh environments.
- **BAS - Building Automation System Controls Simplicity™ INTELLI-Comfort™ Control** - The York® Simplicity™ INTELLI-Comfort™ control is factory installed. It includes a supply air sensor, a return air sensor, and an outside air sensor. There are provisions for a field installed dirty filter indicator switch, an air-proving switch, an Outside Air Humidity sensor, a Return Air Humidity sensor, an Inside IAQ sensor, and an Outside Air IAQ sensor. Construction mode operation, 365-day real time clock with 7 day programming plus holiday scheduling is built-in. Two different modes of demand ventilation are achieved through the INTELLI-Comfort™ using CO₂ sensors. It uses an inside CO₂ sensor to perform Demand Ventilation. It can also use an Outside CO₂ sensor to perform Differential Demand Ventilation. It uses a Patented Comfort Ventilation algorithm to provide comfortable ventilation air temperature. The patented economizer-loading algorithm will protect the equipment when harsh operating conditions exist. Humidity in the occupied space or return duct can be monitored and controlled via humidity sensors and the on-board connection for hot gas re-heat system. It uses the INTELLI-Start™ algorithm to maximize energy savings by recovering the building from the Unoccupied Setpoints to the Occupied Setpoints just in time for the Occupied Time Period to begin. The Simplicity™ INTELLI-Comfort™ balances space temperature, ventilation air temperature, CO₂ and humidity for ultimate comfort.
- **Simplicity™ INTELLI-Comfort™ with ModLINC Control** - The York® Simplicity™ INTELLI-Comfort™ with ModLINC control is factory installed. It includes all the features of the INTELLI-Comfort™ control with an additional control to translate communications from MODBUS to the BACnet MSTP protocol.
- **Novar® BAS Control** - The Novar® ETC-3 building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **Johnson Controls BAS Control** - The Johnson Control YK-UNT-1126 building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch, and air proving switch.
- **CPC BAS Control** - The Computer Process Controls Model 810-3060 ARTC Advanced Rooftop building automation system controller is factory installed. Includes supply air sensor, return air sensor, dirty filter indicator switch and air proving switch.
- **Honeywell BAS Control** - The Honeywell W7750C building automation system controller is factory installed. Includes air supply sensor, return air sensor, dirty filter indicator switch, and air proving switch.

FIELD INSTALLED ACCESSORIES

YORK® offers several equipment accessories for field installation, for the Predator® line.

- **Downflow Economizer - (With barometric relief)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature inputs and positions the dampers to provide the maximum efficiency possible
- **Horizontal Economizer - (Without barometric relief)** - All features of the downflow economizer exist except you must order the duct mount barometric relief separately. **You must order a 1EH0408 if you are installing a power exhaust. You can order a 1RD0411 Barometric Relief for horizontal flow economizer.**
- **Slab Economizer for Energy Recovery Ventilator- (Without barometric relief or Fresh Air Hood)** - The economizer is provided with a single enthalpy input. The economizer is 2% low leakage type. The economizer has spring return, fully modulating damper actuators and is capable of introducing up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the standard single enthalpy input. There is an optional input dual dry bulb available. To meet regulated air standards, the economizer control accepts an optional CO₂ input for demand ventilation. With single enthalpy input, the economizer control monitors outdoor air. The dual enthalpy kit provides a second input used to monitor the return air. With a dual input kit installed, the economizer control compares the values of the two enthalpy or temperature

inputs and positions the dampers to provide the maximum efficiency possible.

You can order 1EH0409 Barometric Relief/FA Hood for field installations without an ERV.

- **Dual Enthalpy Control, Accessory** - This kit contains the required components to convert a single enthalpy economizer to dual enthalpy.
- **Barometric Relief Damper** - Zero to 100% capacity barometric relief dampers for use with horizontal flow, or field installed slab economizers.
- **Power Exhaust** - This accessory installs in the unit with a down flow economizer. Power exhaust plugs into the connector in the unit bulkhead. **You must purchase 1EH0408 barometric relief when applying to a horizontal flow application.**
- **Manual Outdoor Air Damper** - Like the motorized outdoor air damper, each manual outdoor air damper includes a slide-in damper assembly with an outdoor air hood and filters. Customers have a choice of dampers with ranges of 0% to 100% or 0% to 35% outdoor air entry.
- **Motorized Outdoor Air Damper** - The motorized outdoor air damper includes a slide-in/plug-in damper assembly with an outdoor air hood and filters. The outdoor air dampers open to the preset position when the indoor fan motor is energized. The damper has a range of 0% to 100% outdoor air entry. Factory installed option or field installed accessory.
- **Smoke Detectors** - The smoke detectors stop operation of the unit by interrupting power to the control board if smoke is detected within the air compartment.
- **CO₂ Sensor** - Senses CO₂ levels and automatically overrides the economizer when levels rise above the preset limits.
- **Dirty Filter Switch** - This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters.
- **Coil Guard** - Field installed decorative wire coil guard.
- **Hail Guard** - This kit includes a sloped hood which installs over the outside condenser coil and prevents damage to the coil fins from hail strikes. Field installed accessory only.
- **Flue Exhaust Extension Kit** - In locations with wind or weather conditions which may interfere with proper exhausting of furnace combustion products, this kit can be installed to prevent the flue exhaust from entering nearby fresh air intakes.
- **-60°F Gas Heat Kit** - For installations which require gas heat units to perform in low ambient temperatures, a gas

section heating kit is available. This kit provides electric heat in the gas heat controls section to ensure the gas valve and controls will continue to function properly at extremely low temperatures.

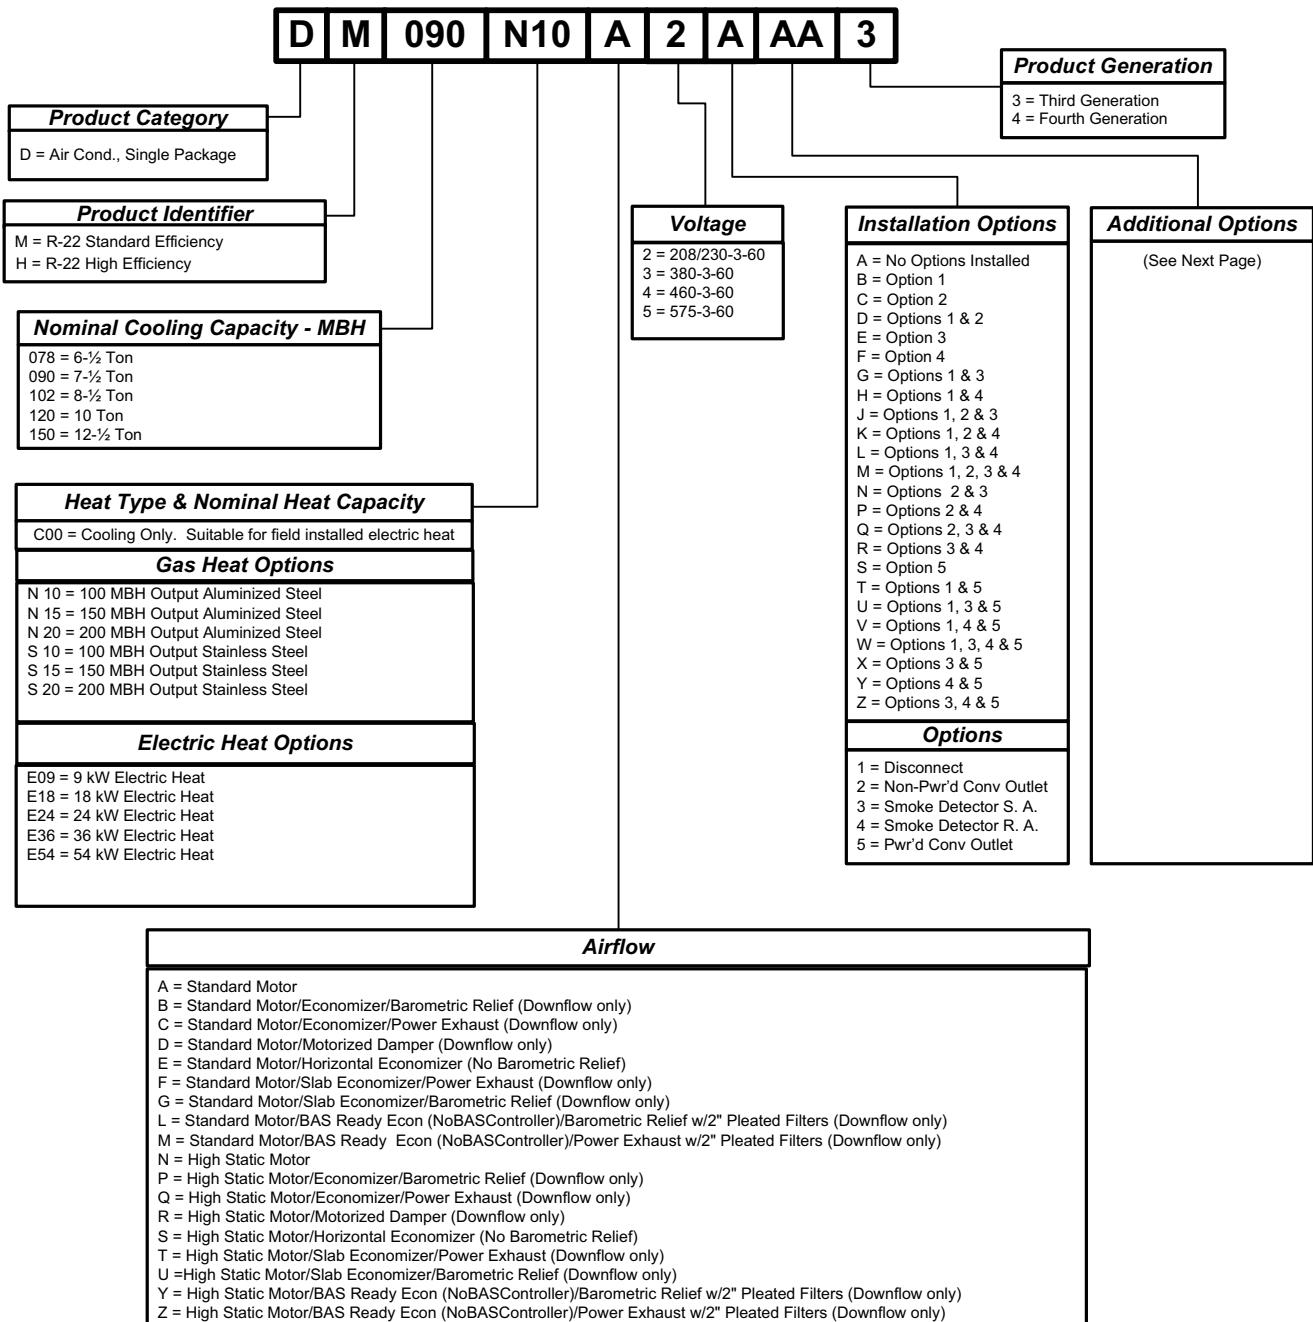
- **Gas Heat High Altitude Kit** - This kit converts a gas heat unit to operate at high altitudes, 2,000 to 6,000 feet. Conversion kits are available for natural gas and propane.
- **Gas Heat Propane Conversion Kit** - This kit converts a gas-fired heater from natural gas to propane. It contains the main burner orifices and gas valve replacement springs.
- **Gas Piping Kit** - Contains pipe nipples, fittings and gas cock required for gas supply connection with external shut off.
- **Electric Heaters** - The electric heaters range from 9 kW to 54kW and are available in all the voltage options of the base units. All heaters are dual staged. Cooling units include an adapter panel for easy installation of the electric heaters. Necessary hardware and connectors are included with the heaters. All heaters are intended for single point power supply.
- **Low Limit / Compressor Lockout Kit**
 1. **Compressor Lockout (CLO)**: To prevent mechanical (compressorized) operation of the unit during cold outdoor conditions where there is a risk of returning liquid refrigerant back to the compressors.
 2. **Low Limit Control (LLC)**: To prevent the supply air from dropping below a specified setpoint by utilizing the units first stage heating means when there is a demand for cooling during cold outside conditions.
- **Metal Frame Filter Kit** - Metal frame with polyester filter medium.
- **Permanent Filters** - Permanent filters are available.
- **Roof Curbs** - The roof curbs have insulated decks and are shipped disassembled. The roof curbs are available in 8" and 14" heights. For applications with security concerns, burglar bars are available for the duct openings of the roof curbs.
- **Roof Curb Transition** - Single Piece Adapter (10" High) - Roof curbs for transitioning from Sunline™ units to Predator® units. Fits 7.5 to 12.5 Sunline™ roof curbs only.
- **Burglar Bars** - Mount in the supply and return openings to prevent entry into the duct work.
- **Thermostat** - The units are designed to operate with 24-volt electronic and electro-mechanical thermostats. All units (with or without an economizer) operate with two-stage heat/two-stage cool or two-stage cooling only thermostats, depending upon unit configuration.

TABLE 1: ACCESSORIES

Part Number	Description	Weight
1RC0470	Roof Curb, 8" Height	-
1RC0471	Roof Curb, 14" Height	-
1RC0472	Roof Curb, Transition (7.5 T through 12.5 T)	-
1BD0408	Burglar Bars, Downflow	-
2TP04520925	Electric Heat 9kW 230V	-
2TP04521825	Electric Heat 18kW 230V	-
2TP04522425	Electric Heat 24kW 230V	-
2TP04523625	Electric Heat 36kW 230V	-
2TP04525425	Electric Heat 54kW 230V	-
2TP04520946	Electric Heat 9kW 460V	-
2TP04521846	Electric Heat 18kW 460V	-
2TP04522446	Electric Heat 24kW 460V	-
2TP04523646	Electric Heat 36kW 460V	-
2TP04525446	Electric Heat 54kW 460V	-
2TP04520958	Electric Heat 9kW 575V	-
2TP04521858	Electric Heat 18kW 575V	-
2TP04522458	Electric Heat 24kW 575V	-
2TP04523658	Electric Heat 36kW 575V	-
2TP04525458	Electric Heat 54kW 575V	-
1FA0411	Manual Outside Air Damper 0-35%, Downflow (Incl. Hood, Damper & Filters, No Barometric Relief)	-
1FA0412	Manual Outside Air Damper 0-100%, Downflow (Incl. Hood, Damper & Filters, No Barometric Relief)	-
2MD04702724	Motorized Damper, Downflow (Incl. Hood, Damper & Filter, no Barometric Relief)	-
2MD04703324	Motorized Damper, Horizontal (Incl. Hood, Damper & Filter, no Barometric Relief)	-
2EE04705024	Economizer, Downflow (Incl. Barometric Relief & All Hoods)	124 lbs.
2EE04705124	Economizer, Horizontal (Incl. Dampers & Hoods, no Barometric Relief)	97 lbs.
2EE04705224	Economizer, Slab, Downflow (Incl. Dampers only no Hoods or Barometric Relief)	-
2PE04703225	Power Exhaust, Downflow, 230V (For Units with Economizer only)	-
2PE04703246	Power Exhaust, Downflow, 460V (For Units with Economizer only)	-
2PE04703258	Power Exhaust, Downflow, 580V (For Units with Economizer only)	-
2EC04700924	Dual Enthalpy Control (Use with Single Enthalpy Economizer)	-
1EH0407	Hood Kit, Downflow Economizer (Included with all Downflow Economizers)	-
1RD0411	Barometric Relief Kit, Ductmount for Horizontal Application (Incl. Damper & Hood)	-
1EH0408	Barometric Relief Kit, Ductmount for Horizontal Application w/ Power Exhaust (Incl. Damper & Hood)	25 lbs.
1EH0409	Barometric Relief / Hood Kit, for Field Installed Slab Econ. w/o ERV (Incl. Barometric Relief & FA Hood)	-
2AQ04700424	CO2 Detector Unit Mount	-
2AQ04700324	CO2 Detector Space Mount	-
2SD04700424	Smoke Detector, Supply or Return (Return Not Available with Horizontal Economizer)	-
2MK04700624	Low Limit / Compressor Lockout Kit	-
1CG0419	Coil Guard (Electric / Electric & HP models)	-
1CG0420	Coil Guard (Gas / Electric models)	-
1HG0411	Hail Guard Kit	-
1GP0404	Gas Piping Kit	-
1NP0441	Propane Conversion Kit	-
1HA0442	High Altitude Kit for Natural Gas	-
1HA0443	High Altitude Kit for Propane	-
1FE0411	Flue Exhaust Extension Kit	-
2BC04700106	Gas Heat Kit, -60 deg F, 230V	-
2BC04700151	Gas Heat Kit, -60 deg F, 460V	-
2BC04700154	Gas Heat Kit, -60 deg F, 575V	-
1FL0402	Permanent Filter Kit	-
2DF0401	Dirty Filter Switch	-
1FF0410	Filter Frame Kit, Metal	-

NOMENCLATURE

6½ - 12½ Ton Predator Model Number Nomenclature



NOMENCLATURE ADDITIONAL OPTIONS

Additional Options	
AA	None
AB	Phase Monitor
AC	Coil Guard
AD	Dirty Filter Switch
AE	Phase Monitor & Coil Guard
AF	Phase Monitor & Dirty Filter Switch
AG	Coil Guard & Dirty Filter Switch
AH	Phase Monitor, Coil Guard, & Dirty Filter Switch
AJ	SS Drain Pan
AK	SS Drain Pan & Phase Monitor
AL	SS Drain Pan & Coil Guard
AM	SS Drain Pan & Dirty Filter Switch
AN	SS Drain Pan, Phase Monitor, Coil Guard & Dirty Filter Switch
CA	CPC Controller with Dirty Filter Switch & Air Proving Switch
CB	CPC Controller, DFS, APS & Phase Monitor
CC	CPC Controller, DFS, APS & Coil Guard
CD	CPC Controller, DFS, APS, Phase Monitor, & Coil Guard
CE	CPC Controller, DFS, APS & Technicoat Cond. Coil
CF	CPC Controller, DFS, APS, Technicoat Cond. Coil, & Phase Monitor
CG	CPC Controller, DFS, APS, Technicoat Cond. Coil, & Coil Guard
CH	CPC Controller, DFS, APS, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
CJ	CPC Controller, DFS, APS & Technicoat Evap. Coil
CK	CPC Controller, DFS, APS, Technicoat Evap. Coil, & Phase Monitor
CL	CPC Controller, DFS, APS, Technicoat Evap. Coil, & Coil Guard
CM	CPC Controller, DFS, APS, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
CN	CPC Controller, DFS, APS & Technicoat Evap. & Cond Coils
CP	CPC Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Phase Monitor
CQ	CPC Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Coil Guard
CR	CPC Controller, DFS, APS, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
CS	CPC Controller, DFS, APS, SS Drain Pan
CT	CPC Controller, DFS, APS, SS Drain Pan, Phase Monitor, & Coil Guard
CU	CPC Controller, DFS, APS, SS Drain Pan, & Technicoat Cond Coils
CV	CPC Controller, DFS, APS, SS Drain Pan, & Technicoat Evap Coil
CW	CPC Controller, DFS, APS, SS Drain Pan, & Technicoat Evap and Cond Coils
CX	CPC Controller, DFS, APS, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils
JA	Johnson UNT Controller with Dirty Filter Switch & Air Proving Switch
JB	Johnson UNT Controller, DFS, APS & Phase Monitor
JC	Johnson UNT Controller, DFS, APS & Coil Guard
JD	Johnson UNT Controller, DFS, APS, Phase Monitor, & Coil Guard
JE	Johnson UNT Controller, DFS, APS & Technicoat Cond. Coil
JF	Johnson UNT Controller, DFS, APS, Technicoat Cond. Coil, & Phase Monitor
JG	Johnson UNT Controller, DFS, APS, Technicoat Cond. Coil, & Coil Guard
JH	Johnson UNT Controller, DFS, APS, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
JJ	Johnson UNT Controller, DFS, APS & Technicoat Evap. Coil
JK	Johnson UNT Controller, DFS, APS, Technicoat Evap. Coil, & Phase Monitor
JL	Johnson UNT Controller, DFS, APS, Technicoat Evap. Coil, & Coil Guard
JM	Johnson UNT Controller, DFS, APS, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
JN	Johnson UNT Controller, DFS, APS & Technicoat Evap. & Cond Coils
JP	Johnson UNT Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Phase Monitor
JQ	Johnson UNT Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Coil Guard
JR	Johnson UNT Controller, DFS, APS, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
JS	Johnson UNT Controller, DFS, APS, SS Drain Pan
JT	Johnson UNT Controller, DFS, APS, SS Drain Pan, Phase Monitor, & Coil Guard
JU	Johnson UNT Controller, DFS, APS, SS Drain Pan, & Technicoat Cond Coils
JV	Johnson UNT Controller, DFS, APS, SS Drain Pan, & Technicoat Evap Coil
JW	Johnson UNT Controller, DFS, APS, SS Drain Pan, & Technicoat Evap and Cond Coils
JX	Johnson UNT Controller, DFS, APS, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils

Additional Options	
HA	Honeywell Excel 10 Controller with Dirty Filter Switch & Air Proving Switch
HB	Honeywell Excel 10 Controller, DFS, APS & Phase Monitor
HC	Honeywell Excel 10 Controller, DFS, APS & Coil Guard
HD	Honeywell Excel 10 Controller, DFS, APS, Phase Monitor, & Coil Guard
HE	Honeywell Excel 10 Controller, DFS, APS & Technicoat Cond. Coil
HF	Honeywell Excel 10 Controller, DFS, APS, Technicoat Cond. Coil, & Phase Monitor
HG	Honeywell Excel 10 Controller, DFS, APS, Technicoat Cond. Coil, & Coil Guard
HH	Honeywell Excel 10 Controller, DFS, APS, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
HJ	Honeywell Excel 10 Controller, DFS, APS & Technicoat Evap. Coil
HK	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. Coil, & Phase Monitor
HL	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. Coil, & Coil Guard
HM	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
HN	Honeywell Excel 10 Controller, DFS, APS & Technicoat Evap. & Cond Coils
HP	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Phase Monitor
HQ	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Coil Guard
HR	Honeywell Excel 10 Controller, DFS, APS, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
HS	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan
HT	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan, Phase Monitor, & Coil Guard
HU	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan, & Technicoat Cond Coils
HV	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan, & Technicoat Evap Coil
HW	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan, & Technicoat Evap and Cond Coils
HX	Honeywell Excel 10 Controller, DFS, APS, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils
WA	Intelli-Comfort w/ModLINC Controller
WB	Intelli-Comfort w/ModLINC Controller, & Phase Monitor
WC	Intelli-Comfort w/ModLINC Controller, & Coil Guard
WD	Intelli-Comfort w/ModLINC Controller, Phase Monitor, & Coil Guard
WE	Intelli-Comfort w/ModLINC Controller, & Technicoat Cond. Coil
WF	Intelli-Comfort w/ModLINC Controller, Technicoat Cond. Coil, & Phase Monitor
WG	Intelli-Comfort w/ModLINC Controller, Technicoat Cond. Coil, & Coil Guard
WH	Intelli-Comfort w/ModLINC Controller, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
WJ	Intelli-Comfort w/ModLINC Controller, & Technicoat Evap. Coil
WK	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. Coil, & Phase Monitor
WL	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. Coil, & Coil Guard
WM	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
WN	Intelli-Comfort w/ModLINC Controller, & Technicoat Evap. & Cond Coils
WP	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. & Cond Coils, & Phase Monitor
WQ	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. & Cond Coils, & Coil Guard
WR	Intelli-Comfort w/ModLINC Controller, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
WS	Intelli-Comfort w/ModLINC Controller, SS Drain Pan
WT	Intelli-Comfort w/ModLINC Controller, SS Drain Pan, Phase Monitor, & Coil Guard
WU	Intelli-Comfort w/ModLINC Controller, SS Drain Pan, & Technicoat Cond Coils
WV	Intelli-Comfort w/ModLINC Controller, SS Drain Pan, & Technicoat Evap Coil
WW	Intelli-Comfort w/ModLINC Controller, SS Drain Pan, & Technicoat Evap and Cond Coils
WX	Intelli-Comfort w/ModLINC Controller, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils
NA	Novar ETC-3 Controller with Dirty Filter Switch & Air Proving Switch
NB	Novar ETC-3 Controller, DFS, APS & Phase Monitor
NC	Novar ETC-3 Controller, DFS, APS & Coil Guard
ND	Novar ETC-3 Controller, DFS, APS, Phase Monitor, & Coil Guard
NE	Novar ETC-3 Controller, DFS, APS & Technicoat Cond. Coil
NF	Novar ETC-3 Controller, DFS, APS, Technicoat Cond. Coil, & Phase Monitor
NG	Novar ETC-3 Controller, DFS, APS, Technicoat Cond. Coil, & Coil Guard
NH	Novar ETC-3 Controller, DFS, APS, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
NJ	Novar ETC-3 Controller, DFS, APS & Technicoat Evap. Coil
NK	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. Coil, & Phase Monitor
NL	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. Coil, & Coil Guard
NM	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
NN	Novar ETC-3 Controller, DFS, APS & Technicoat Evap. & Cond Coils
NP	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Phase Monitor
NQ	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. & Cond Coils, & Coil Guard

Additional Options	
NR	Novar ETC-3 Controller, DFS, APS, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
NS	Novar ETC-3 Controller, DFS, APS, SS Drain Pan
NT	Novar ETC-3 Controller, DFS, APS, SS Drain Pan, Phase Monitor, & Coil Guard
NU	Novar ETC-3 Controller, DFS, APS, SS Drain Pan, & Technicoat Cond Coils
NV	Novar ETC-3 Controller, DFS, APS, SS Drain Pan, & Technicoat Evap Coil
NW	Novar ETC-3, DFS, APS, SS Drain Pan, & Technicoat Evap and Cond Coils
NX	Novar ETC-3 Controller, DFS, APS, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils
LA	Simplicity Intelli-Comfort Controller
LB	Simplicity Intelli-Comfort Controller, & Phase Monitor
LC	Simplicity Intelli-Comfort Controller, & Coil Guard
LD	Simplicity Intelli-Comfort Controller, Phase Monitor, & Coil Guard
LE	Simplicity Intelli-Comfort Controller, & Technicoat Cond. Coil
LF	Simplicity Intelli-Comfort Controller, Technicoat Cond. Coil, & Phase Monitor
LG	Simplicity Intelli-Comfort Controller, Technicoat Cond. Coil, & Coil Guard
LH	Simplicity Intelli-Comfort Controller, Technicoat Cond. Coil, Phase Monitor, & Coil Guard
LJ	Simplicity Intelli-Comfort Controller, & Technicoat Evap. Coil
LK	Simplicity Intelli-Comfort Controller, Technicoat Evap. Coil, & Phase Monitor
LL	Simplicity Intelli-Comfort Controller, Technicoat Evap. Coil, & Coil Guard
LM	Simplicity Intelli-Comfort Controller, Technicoat Evap. Coil, Phase Monitor, & Coil Guard
LN	Simplicity Intelli-Comfort Controller, & Technicoat Evap. & Cond Coils
LP	Simplicity Intelli-Comfort Controller, Technicoat Evap. & Cond Coils, & Phase Monitor
LQ	Simplicity Intelli-Comfort Controller, Technicoat Evap. & Cond Coils, & Coil Guard
LR	Simplicity Intelli-Comfort Controller, Technicoat Evap. & Cond Coils, Phase Monitor, & Coil Guard
LS	Simplicity Intelli-Comfort Controller, SS Drain Pan
LT	Simplicity Intelli-Comfort Controller, SS Drain Pan, Phase Monitor, & Coil Guard
LU	Simplicity Intelli-Comfort Controller, SS Drain Pan, & Technicoat Cond Coils
LV	Simplicity Intelli-Comfort Controller, SS Drain Pan, & Technicoat Evap Coil
LW	Simplicity Intelli-Comfort Controller, SS Drain Pan, & Technicoat Evap and Cond Coils
LX	Simplicity Intelli-Comfort Controller, SS Drain Pan, Phase Monitor, Coil Guard, & Technicoat Evap and Cond Coils
TA	Technicoat Condenser Coil
TB	Technicoat Condenser Coil & Phase Monitor
TC	Technicoat Condenser Coil & Coil Guard
TD	Technicoat Condenser Coil & Dirty Filter Switch
TE	Technicoat Condenser Coil, Phase Monitor, & Coil Guard
TF	Technicoat Condenser Coil, Phase Monitor, & Dirty Filter Switch
TG	Technicoat Condenser Coil, Coil Guard, & Dirty Filter Switch
TH	Technicoat Condenser Coil, Phase Monitor, Coil Guard, & Dirty Filter Switch
TJ	Technicoat Evaporator Coil
TK	Technicoat Evaporator Coil & Phase Monitor
TL	Technicoat Evaporator Coil & Coil Guard
TM	Technicoat Evaporator Coil & Dirty Filter Switch
TN	Technicoat Evaporator Coil, Phase Monitor, & Coil Guard
TP	Technicoat Evaporator Coil, Phase Monitor, & Dirty Filter Switch
TQ	Technicoat Evaporator Coil, Coil Guard, & Dirty Filter Switch
TR	Technicoat Evaporator Coil, Phase Monitor, Coil Guard, & Dirty Filter Switch
TS	Technicoat Evaporator & Condenser Coils
TT	Technicoat Evaporator & Condenser Coils & Phase Monitor
TU	Technicoat Evaporator & Condenser Coils & Coil Guard
TV	Technicoat Evaporator & Condenser Coils & Dirty Filter Switch
TW	Technicoat Evaporator & Condenser Coils, Phase Monitor, & Coil Guard
TX	Technicoat Evaporator & Condenser Coils, Phase Monitor, & Dirty Filter Switch
TY	Technicoat Evaporator & Condenser Coils, Coil Guard, & Dirty Filter Switch
TZ	Technicoat Evaporator & Condenser Coils, Phase Monitor, Coil Guard, & Dirty Filter Switch
T1	Technicoat Condenser & SS Drain Pan
T3	Technicoat Condenser Coil, SS Drain Pan, Phase Monitor, Coil Guard, & Dirty Filter Switch
T4	Technicoat Evaporator & SS Drain Pan
T6	Technicoat Evaporator Coil, SS Drain Pan, Phase Monitor, Coil Guard, & Dirty Filter Switch
T7	Technicoat Evaporator & Condenser Coils & SS Drain Pan
T9	Technicoat Evaporator & Condenser Coils, SS Drain Pan, Phase Monitor, Coil Guard, & Dirty Filter Switch

TABLE 2: PHYSICAL DATA

Component		Models				
		078	090	102	120	150
Evaporator Blower	Blower, Centrifugal (Dia. X Wd. in.)	15 x 15				
	Motor, Standard (HP)	1-1/2	1-1/2	2	2	3
	Motor, Optional (HP)	2	2	3	3	5
Evaporator Coil	Rows	2	2	3	2	3
	Fins per Inch	15	15	15	15	15
	Height (in.)	30	32	24	40	40
	Face Area (ft. ² each)	9.9	10.6	7.9	13.2	13.2
Condenser Fan (2 per Unit)	Propeller Dia. (in., each)	24	24	24	24	24
	Motor (HP, each)	1/3	1/3	3/4	3/4	3/4
	CFM, Nominal (each)	3400	3400	4400	4400	4400
Condenser Coil (2 per unit)	Rows (each)	1	1	1	1	2
	Fins per Inch	20	20	20	20	20
	Height (in. each)	24	28	36	44	44
	Face Area (ft. ² each)	7.9	9.2	11.9	14.5	14.5
Refrigerant Charge	System 1 (lb./oz.)	4/6	4/12	5/0	6/12	10/12
	System 2 (lb./oz.)	4/0	4/6	5/4	6/12	11/0
Compressors	Quantity	2	2	2	2	2
	Type	Recip	Recip	Recip	Recip	Scroll
Air Filters	Size (Wd. x Ht. x Thickness in.)	25x20x2	25x20x2	25x20x2	25x20x2	25x20x2
	Number Per Unit	4	4	4	4	4

TABLE 3: DM CAPACITY RATINGS

Size (Tons)	Model	Cooling Capacities ARI Ratings*			CFM	Sound Rating (dB)†	Nominal Electric Heat Capacity‡ (kW)	Gas Heat Capacity				Gas Line Size (in. OD)
		MBH	EER	IPLV				Input (MBH)	Output (MBH)	Seasonal Efficiency (%)	Temp. Rise (°F)	
078 (6-1/2)	Cooling Only	77	9.0	9.45	2600	84	-	-	-	-	-	-
	Electric Heat						9, 18, 24, 34	-	-	-	-	-
	Gas Heat						-	120	96	80	20-50	3/4
	Gas Heat						-	180	144	80	35-65	3/4
090 (7-1/2)	Cooling Only	86	9.0	10.15	3000	84	-	-	-	-	-	-
	Electric Heat						9, 18, 24, 34	-	-	-	-	-
	Gas Heat						-	120	96	80	15-45	3/4
	Gas Heat						-	180	144	80	30-60	3/4
102 (8-1/2)	Cooling Only	98	9.0	9.35	3000	90	-	-	-	-	-	-
	Electric Heat						9, 18, 24, 34	-	-	-	-	-
	Gas Heat						-	120	96	80	15-45	3/4
	Gas Heat						-	180	144	80	10-40	3/4
120 (10)	Cooling Only	120	9.0	9.10	4000	90	-	-	-	-	-	-
	Electric Heat						9, 24, 34 54	-	-	-	-	-
	Gas Heat						-	180	144	80	20-50	3/4
	Gas Heat						-	240	192	80	35-65	3/4
150 (12-1/2)	Cooling Only	144	9.3	9.25	4500	90	-	-	-	-	-	-
	Electric Heat						9, 24, 34, 54	-	-	-	-	-
	Gas Heat						-	180	144	80	10-40	3/4
	Gas Heat						-	240	192	80	25-55	3/4

* Rated at 95°F ambient 80°F dry bulb and 67°F wet bulb.

† Rated in accordance with ARI 270 standard.

‡ See Table 20.

TABLE 4: UNIT VOLTAGE LIMITATIONS

POWER RATING	MIN.	MAX.
208/230-3-60	187	252
460-3-60	432	504
575-3-60	540	630

TABLE 21: BLOWER PERFORMANCE 6-1/2 TON SIDE DUCT

CFM	External Static Pressure															
	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6								
	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	
1900	---	---	---	687	0.69	641	764	0.81	758	839	0.95	884	893	1.18	1097	957
2000	---	---	---	697	0.72	676	772	0.84	782	846	1.01	940	900	1.22	1137	963
2100	---	---	---	707	0.76	712	781	0.87	810	854	1.07	987	907	1.26	1179	970
2200	---	---	---	608	0.61	572	717	0.80	750	789	0.90	843	861	1.13	1055	913
2300	---	---	---	623	0.66	614	727	0.85	790	798	0.94	880	869	1.19	1113	920
2400	---	---	---	639	0.71	659	736	0.89	832	807	0.99	922	876	1.26	1172	927
2500	602	0.59	550	654	0.76	705	746	0.94	877	815	1.04	968	884	1.32	1232	934
2600	612	0.64	600	669	0.81	755	756	0.99	923	824	1.09	1019	891	1.39	1292	940
2700	622	0.70	652	684	0.86	806	766	1.04	971	832	1.15	1074	899	1.45	1353	947
2800	632	0.76	707	699	0.92	860	776	1.10	1022	841	1.22	1133	906	1.52	1414	954
2900	642	0.82	764	715	0.98	917	786	1.15	1074	850	1.28	1197	914	1.58	1476	960
3000	652	0.88	823	730	1.05	976	795	1.21	1129	858	1.36	1266	921	1.65	1539	967
3100	662	0.95	885	745	1.11	1037	805	1.27	1185	867	1.44	1339	929	1.72	1602	974
3200	672	1.02	949	760	1.18	1100	815	1.33	1244	876	1.52	1417	936	1.79	1666	981
3300	682	1.09	1016	776	1.25	1166	825	1.40	1305	884	1.61	1499	944	1.86	1731	987

High Horsepower Option Required

TABLE 22: BLOWER PERFORMANCE 7-1/2 TON SIDE DUCT

		External Static Pressure													
CFM	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8						
RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM
2200	---	---	---	697	0.85	794	777	0.90	843	851	1.04	969	910	1.32	1226
2300	---	---	---	709	0.87	810	787	0.94	873	859	1.10	1025	917	1.36	1270
2400	---	---	---	720	0.89	832	797	0.97	908	868	1.16	1082	924	1.41	1317
2500	---	---	646	0.74	689	732	0.92	860	807	1.02	949	876	1.22	1141	932
2600	---	---	662	0.78	725	744	0.96	833	816	1.07	996	884	1.29	1203	939
2700	---	---	677	0.82	766	755	1.00	932	826	1.12	1047	893	1.36	1267	946
2800	638	0.71	666	0.87	813	767	1.05	976	836	1.18	1104	901	1.43	1333	954
2900	654	0.78	724	1.07	0.93	866	779	1.10	1025	846	1.25	1167	909	1.50	1401
3000	670	0.84	787	1.22	0.99	924	791	1.16	1081	866	1.33	1235	918	1.58	1471
3100	686	0.92	855	1.38	1.06	987	802	1.22	1141	866	1.40	1309	926	1.66	1543
3200	702	1.00	929	1.53	1.13	1056	814	1.30	1208	875	1.49	1388	934	1.74	1618
3300	718	1.08	1009	1.68	1.21	1131	826	1.37	1280	885	1.58	1472	943	1.82	1694
3400	734	1.17	1094	1.83	1.30	1211	837	1.46	1357	895	1.68	1562	951	1.90	1773
3500	750	1.27	1185	1.99	1.39	1297	849	1.54	1440	905	1.78	1658	959	1.99	1854
3600	766	1.37	1281	2.14	1.49	1388	861	1.64	1528	915	1.89	1759	968	2.08	1937
3700	782	1.48	1383	2.29	1.59	1485	872	1.74	1622	925	2.00	1865	976	2.17	2022
3800	798	1.60	1490	2.44	1.70	1587	884	1.85	1721	935	2.12	1977	984	2.26	2109

High Horsepower Option Required

TABLE 24: BLOWER PERFORMANCE 10 TON SIDE DUCT

CFM	External Static Pressure											
	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	BHP	Watts	RPM
	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM
3000	---	---	---	---	741	1.20	1122	816	1.35	1256	865	1.46
3100	---	---	---	---	755	1.13	1049	828	1.41	1314	876	1.54
3200	---	---	---	---	769	1.18	1100	840	1.48	1376	887	1.61
3300	---	---	---	---	783	1.24	1156	851	1.55	1443	899	1.69
3400	694	1.18	1102	747	1.30	1216	97	1.43	1336	863	1.62	1514
3500	707	1.25	1161	761	1.37	1281	81	1.51	1404	874	1.70	1589
3600	720	1.31	1224	775	1.45	1351	825	1.59	1477	886	1.79	1669
3700	733	1.38	1290	789	1.53	1426	839	1.67	1556	897	1.88	1753
3800	746	1.46	1361	803	1.61	1505	853	1.76	1641	909	1.98	1841
3900	759	1.54	1435	817	1.70	1589	867	1.86	1731	920	2.07	1934
4000	772	1.62	1513	831	1.80	1678	881	1.96	1827	932	2.18	2031
4100	784	1.71	1595	845	1.90	1771	895	2.07	1928	943	2.29	2132
4200	797	1.80	1680	859	2.01	1869	909	2.18	2035	955	2.40	2238
4300	810	1.90	1770	873	2.12	1972	923	2.30	2148	966	2.52	2348
4400	823	2.00	1863	887	2.23	2079	937	2.43	2266	978	2.64	2463
4500	836	2.10	1960	901	2.35	2191	951	2.56	2390	989	2.77	2581
4600	849	2.21	2061	915	2.48	2308	965	2.70	2519	1001	2.90	2705
4700	862	2.32	2166	929	2.61	2430	979	2.85	2654	1012	3.04	2832
4800	875	2.44	2274	943	2.74	2556	993	3.00	2795	1024	3.18	2964
4900	888	2.56	2387	957	2.88	2687	1007	3.15	2941	1036	3.33	3100
5000	901	2.69	2503	971	3.03	2823	1021	3.32	3093	---	---	---

High Horsepower Option Required

TABLE 25: BLOWER PERFORMANCE 12-1/2 TON SIDE DUCT

CFM	External Static Pressure										2.0		
	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	BHP	Watts	
RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	
3700	---	---	---	---	---	874	1.93	1801	927	2.04	1906	984	2.27
3800	---	---	---	---	840	1.82	1699	888	2.01	1871	941	2.14	
3900	---	---	---	855	1.92	1786	903	2.09	1947	954	2.24		
4000	---	---	870	2.01	1877	917	2.18	2028	968	2.34			
4100	---	885	2.12	1973	932	2.27	2115	982	2.45				
4200	834	2.11	1970	900	2.22	2072	946	2.37	2207	996	2.56		
4300	851	2.19	2042	915	2.33	2175	961	2.47	2305	1009	2.68		
4400	868	2.28	2121	931	2.45	2283	975	2.58	2409	1023	2.81		
4500	822	2.13	1990	885	2.37	2208	946	2.57	2395	990	2.70		
4600	838	2.23	2083	901	2.47	2301	961	2.69	2511	1004	2.82		
4700	854	2.34	2184	918	2.58	2401	976	2.82	2631	1019	2.95		
4800	870	2.46	2291	935	2.69	2508	991	2.96	2755	1033	3.09		
4900	887	2.58	2406	952	2.81	2622	1007	3.09	2883	1048	3.23		
5000	903	2.71	2527	968	2.94	2744	1022	3.24	3016	1062	3.38		
5100	919	2.85	2656	985	3.08	2872	1037	3.38	3152	1077	3.53		
5200	936	2.99	2791	1002	3.23	3007	1052	3.53	3293	1091	3.69		
5300	952	3.15	2934	1018	3.38	3149	1067	3.69	3438	1106	3.85		
5400	968	3.31	3083	1035	3.54	3298	1083	3.85	3587	1120	4.03		
5500	984	3.48	3240	1052	3.71	3455	1098	4.01	3740	1135	4.20		
5600	1001	3.65	3403	1069	3.88	3618	1113	4.18	3897	1149	4.39		
5700	1017	3.83	3574	1085	4.06	3788	1128	4.35	4058	1164	4.58		
5800	1033	4.02	3751	1102	4.25	3965	1143	4.53	4224	1178	4.77		
5900	1050	4.22	3936	1119	4.45	4149	1159	4.71	4393	1193	4.97		
6000	1066	4.43	4127	1136	4.66	4341	1174	4.90	4567	1207	5.18		
6100	1082	4.64	4326	1152	4.87	4539	1189	5.09	4745	1222	5.39		
6200	1098	4.86	4531	1169	5.09	4744	1204	5.29	4927	1236	5.61		

High Horsepower Option Required

TABLE 26: BLOWER PERFORMANCE 6-1/2 TON DOWNSHOT

CFM	External Static Pressure																		
	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	BHP	RPM									
RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	BHP	Watts	RPM	
1900	---	---	---	733	0.75	698	804	0.9	825	881	1.03	963	931	1.21	1124	980	1.37	1279	1019
2000	---	---	---	745	0.8	742	814	0.94	872	885	1.09	1047	939	1.27	1181	987	1.43	1336	1025
2100	---	---	---	756	0.85	789	824	0.99	922	889	1.15	1073	946	1.33	1240	993	1.5	1395	1031
2200	---	---	---	767	0.9	839	835	1.05	975	894	1.21	1131	954	1.4	1301	1000	1.56	1454	1036
2300	---	---	720	0.75	699	778	0.96	891	845	1.1	1030	898	1.28	1191	962	1.46	1363	1006	1.63
2400	---	---	732	0.82	763	789	1.01	946	855	1.17	1088	902	1.34	1253	969	1.53	1426	1013	1.69
2500	---	---	743	0.9	828	801	1.08	1003	865	1.23	1148	906	1.41	1317	977	1.6	1491	1019	1.76
2600	---	---	755	0.96	895	812	1.14	1063	875	1.3	1211	910	1.48	1384	985	1.67	1558	1026	1.83
2700	728	0.76	709	767	1.03	964	823	1.21	1125	886	1.37	1276	914	1.56	1452	992	1.75	1627	1032
2800	739	0.86	801	778	1.11	1035	834	1.28	1190	896	1.44	1344	918	1.63	1523	1000	1.82	1697	1039
2900	750	0.96	894	790	1.19	1107	846	1.35	1257	906	1.52	1414	923	1.71	1596	1008	1.9	1769	1045
3000	761	1.06	987	801	1.27	1182	857	1.42	1327	916	1.59	1487	927	1.79	1671	1015	1.98	1842	1027
3100	772	1.16	1080	813	1.35	1258	868	1.5	1400	926	1.68	1562	931	1.87	1748	1023	2.06	1917	1038
3200	784	1.26	1175	825	1.43	1336	879	1.58	1475	937	1.76	1640	935	1.96	1827	---	---	---	---
3300	795	1.36	1269	836	1.52	1417	890	1.67	1552	947	1.85	1721	939	2.05	1908	---	---	---	---

High Horsepower Option Required

Motor Efficiency 0.8

Std HP Motor 1.5

TABLE 27: BLOWER PERFORMANCE 7-1/2 TON DOWNSHOT

CFM	External Static Pressure																							
	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	BHP	RPM	Watts													
2200	---	---	791	0.78	726	830	1.09	1015	889	1.23	1149	950	1.36	1272	1004	1.54	1435	1046	1.71	1597				
2300	---	---	798	0.87	811	839	1.16	1077	897	1.29	1233	958	1.43	1330	1011	1.61	1497	1052	1.78	1660				
2400	---	---	806	0.96	894	848	1.22	1138	906	1.35	1258	966	1.49	1389	1018	1.67	1561	1058	1.85	1725				
2500	---	---	814	1.05	977	857	1.29	1200	915	1.41	1314	974	1.56	1450	1025	1.74	1626	1064	1.92	1790				
2600	---	---	801	0.75	698	822	1.14	1058	865	1.35	1261	924	1.47	1371	982	1.62	1512	1032	1.82	1692	1070	1.99	1857	
2700	---	---	808	0.87	806	830	1.22	1139	874	1.42	1323	933	1.53	1429	990	1.69	1576	1039	1.89	1760	1076	2.07	1925	
2800	---	---	814	0.98	913	838	1.31	1218	883	1.49	1384	941	1.60	1488	998	1.76	1640	1046	1.96	1829	---	---	---	
2900	---	---	820	1.09	1018	846	1.39	1296	892	1.55	1446	950	1.66	1548	1007	1.83	1707	1053	2.04	1899	---	---	---	
3000	817	0.87	812	827	1.20	1121	854	1.47	1373	900	1.62	1508	959	1.73	1609	1015	1.90	1774	1060	2.11	1971	---	---	---
3100	822	1.00	936	833	1.31	1222	862	1.55	1449	909	1.68	1569	968	1.79	1671	1023	1.98	1843	---	---	---	---	---	---
3200	827	1.13	1058	840	1.42	1321	869	1.64	1524	918	1.75	1631	976	1.86	1734	1031	2.05	1914	---	---	---	---	---	---
3300	832	1.26	1177	846	1.52	1418	877	1.71	1598	927	1.82	1692	985	1.93	1798	1039	2.13	1986	---	---	---	---	---	---
3400	837	1.39	1295	853	1.62	1513	885	1.79	1671	936	1.88	1754	994	2.00	1863	1047	2.21	2059	---	---	---	---	---	---
3500	842	1.51	1410	859	1.72	1606	893	1.87	1742	944	1.95	1816	1003	2.07	1928	---	---	---	---	---	---	---	---	---
3600	847	1.63	1523	866	1.82	1697	901	1.95	1813	953	2.01	1877	1012	2.14	1986	---	---	---	---	---	---	---	---	---
3700	852	1.75	1633	872	1.92	1787	909	2.02	1883	962	2.08	1939	1020	2.21	2063	---	---	---	---	---	---	---	---	---
3800	857	1.87	1741	878	2.01	1874	917	2.09	1951	971	2.15	2001	1029	2.29	2132	---	---	---	---	---	---	---	---	---

High Horsepower Option Required

Motor Efficiency 0.8

Std HP Motor 1.5

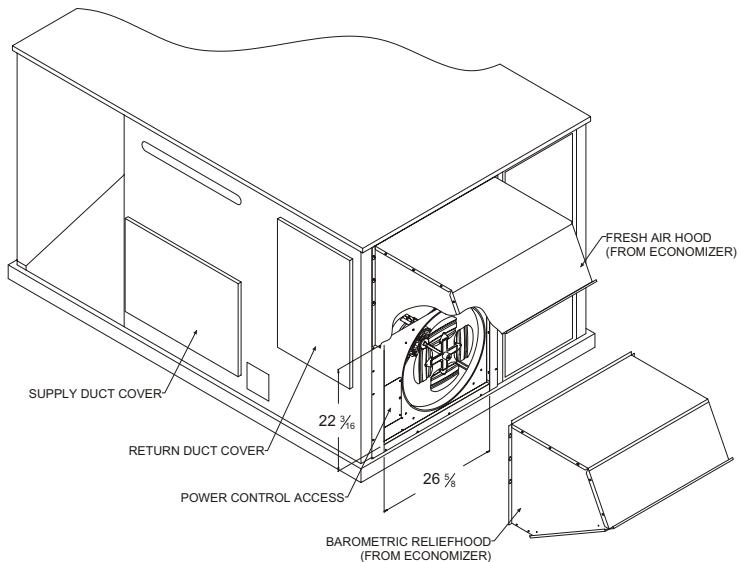
TABLE 33: INDOOR BLOWER SPECIFICATIONS

MODEL	MOTOR					MOTOR SHEAVE			BLOWER SHEAVE			BELT
	HP	RPM	Eff.	SF	Frame	Datum Dia. (in.)	Bore (in.)	Model	Datum Dia. (in.)	Bore (in.)	Model	
DM078	1-1/2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	9.5	1	AK99	A58
	2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.5	1	AK79	A55
DM090	1-1/2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	9.0	1	AK94	A57
	2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.5	1	AK79	A55
DM102	2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	9.0	1	AK94	A56
	3	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
DM120	2	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	8.5	1	AK89	A56
	3	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
DM150	3	1725	80%	1.15	56	3.4 - 4.4	7/8	1VM50	7.0	1	AK74	A54
	5	1725	87%	1.15	184T	4.3 - 5.3	1 1/8	1VP56	6.7	1	BK77	BX55

TABLE 34: POWER EXHAUST SPECIFICATIONS

POWER EXHAUST MODEL	VOLT	PHASE	MOTOR			ELECTRICAL			FUSE SIZE	CFM@ 0.1 ESP
			HP	RPM*	QTY	LRA	FLA	MCA		
2PE0473125	208/230	1	0.75	1075	1	24.9	5.0	6.3	10	3,800
2PE0473146	460	1				N/A	2.2	2.8	5	
2PE0473158	575	1		1050		N/A	1.5	1.9	4	

* Motors are multi-tapped and factory wired for high speed.

**FIGURE 2 - POWER EXHAUST ACCESSORY DOWNFLOW APPLICATION**

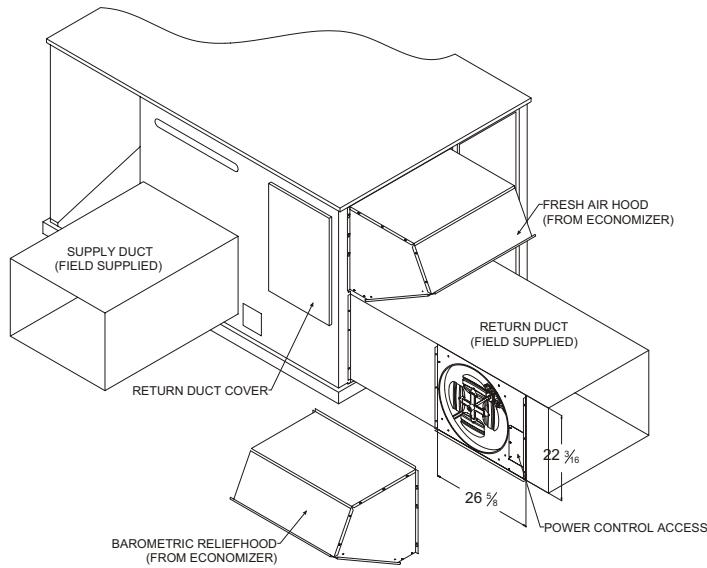


FIGURE 3 - POWER EXHAUST ACCESSORY HORIZONTAL APPLICATION

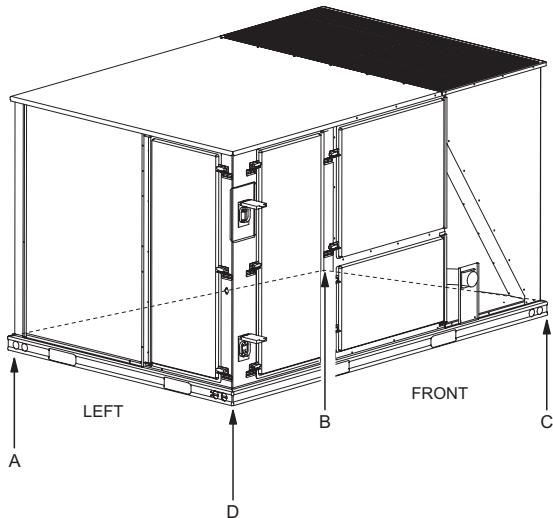


FIGURE 4 - UNIT 4 POINT LOAD

TABLE 35: 4 POINT LOAD WEIGHT

Model	Location (lbs.)			
	A	B	C	D
DM078	228	195	285	333
DM090	230	197	287	336
DM102	238	203	296	347
DM120	245	209	305	357
DM150	262	224	327	382

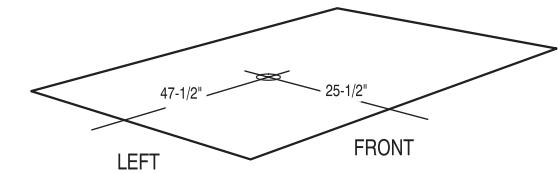


FIGURE 5 - UNIT CENTER OF GRAVITY

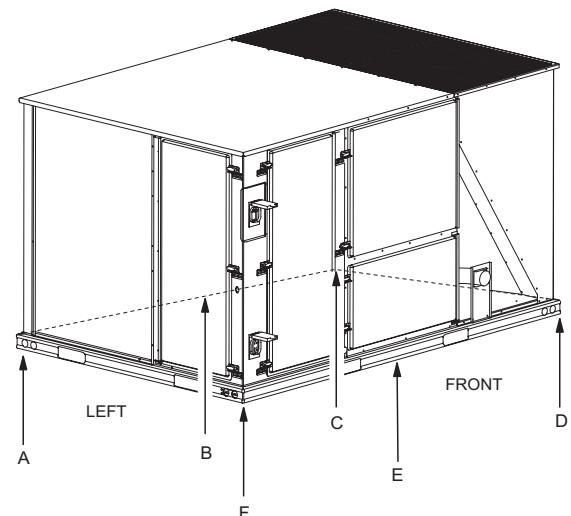


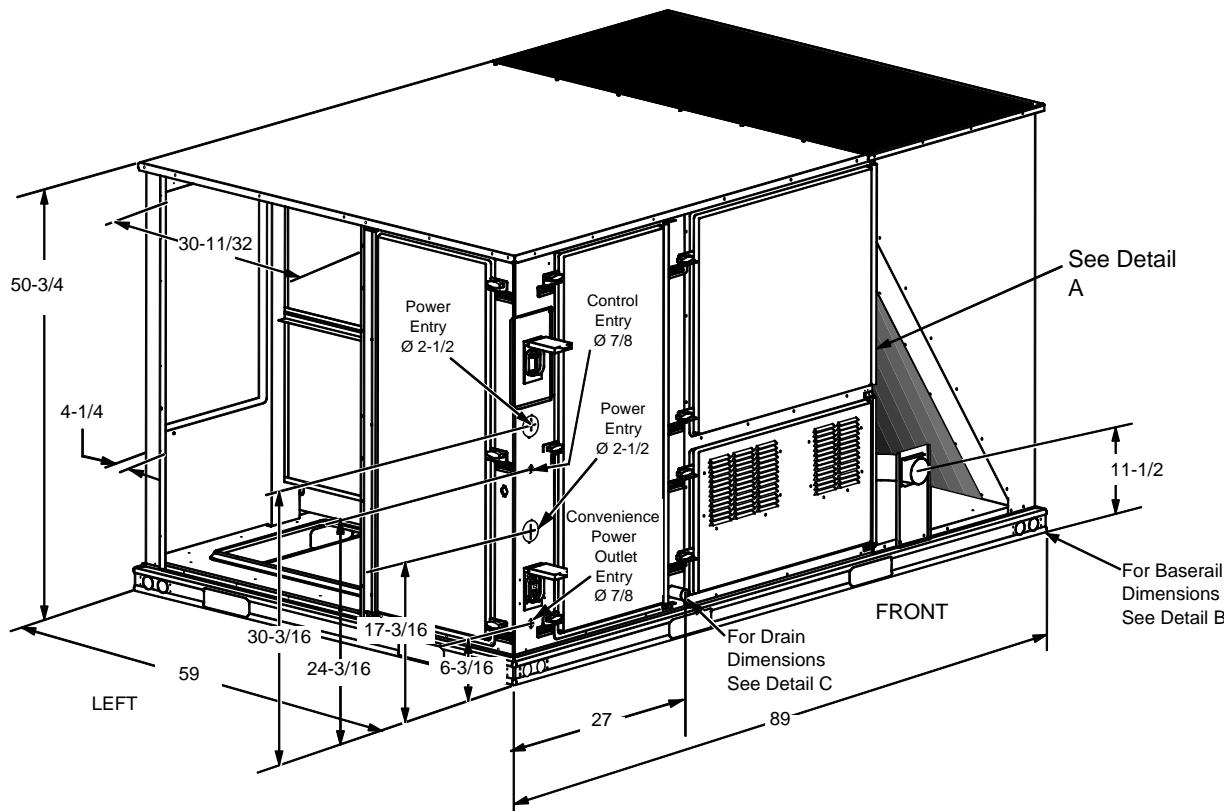
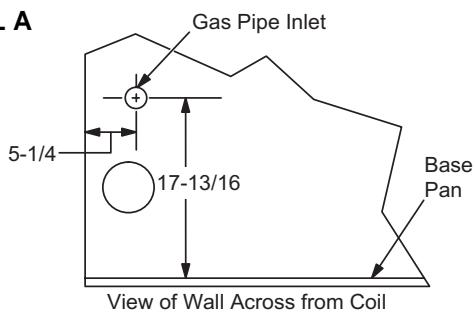
FIGURE 6 - UNIT 6 POINT LOAD

TABLE 36: 6 POINT LOAD WEIGHT

Model	Locations (lbs.)					
	A	B	C	D	E	F
DM078	156	140	127	185	205	228
DM090	158	142	128	187	207	230
DM102	163	146	132	192	213	237
DM120	168	151	136	198	219	244
DM150	180	161	145	212	235	262

TABLE 37: UNIT WEIGHT

Model	Shipping Weight (lbs.)	Operating Weight (lbs.)
DM078	1046	1041
DM090	1056	1051
DM102	1089	1084
DM120	1121	1116
DM150	1200	1195

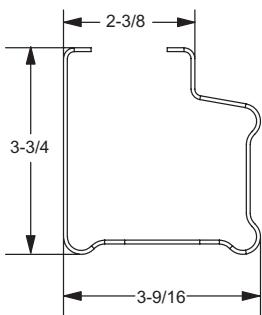
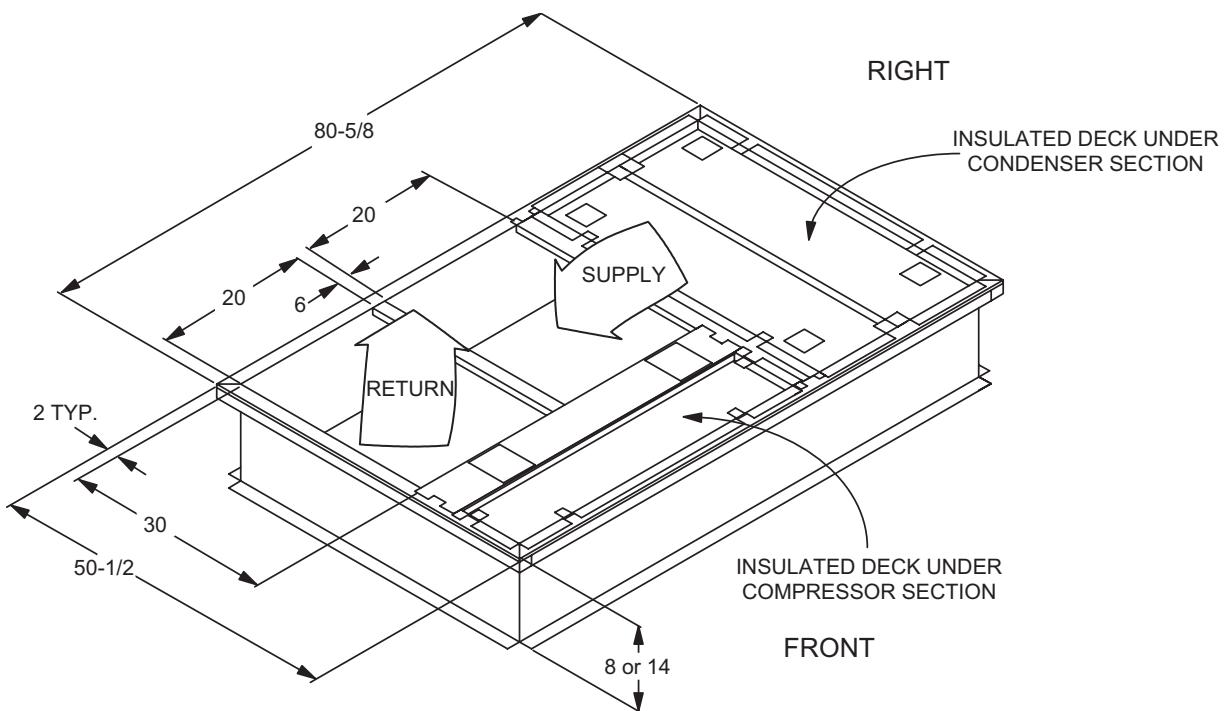
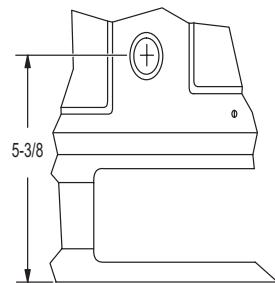
**FIGURE 7 - UNIT DIMENSIONS****DETAIL A****TABLE 38: UNIT CLEARANCES**

Top*	72"	Right	12"
Front	36"	Left	36"
Rear†	36"	Bottom‡	0"

* Units must be installed outdoors. Overhanging structure or shrubs should not obstruct condenser air discharge outlet.

† To remove the slide-out drain pan, a rear clearance of 60" is required. If space is unavailable, the drain pan can be removed through the front by separating the corner wall.

‡ Units may be installed on combustible floors made from wood or class A, B or C roof covering materials.

DETAIL B**DETAIL C****FIGURE 8 - PREDATOR® ROOF CURB DIMENSIONS**

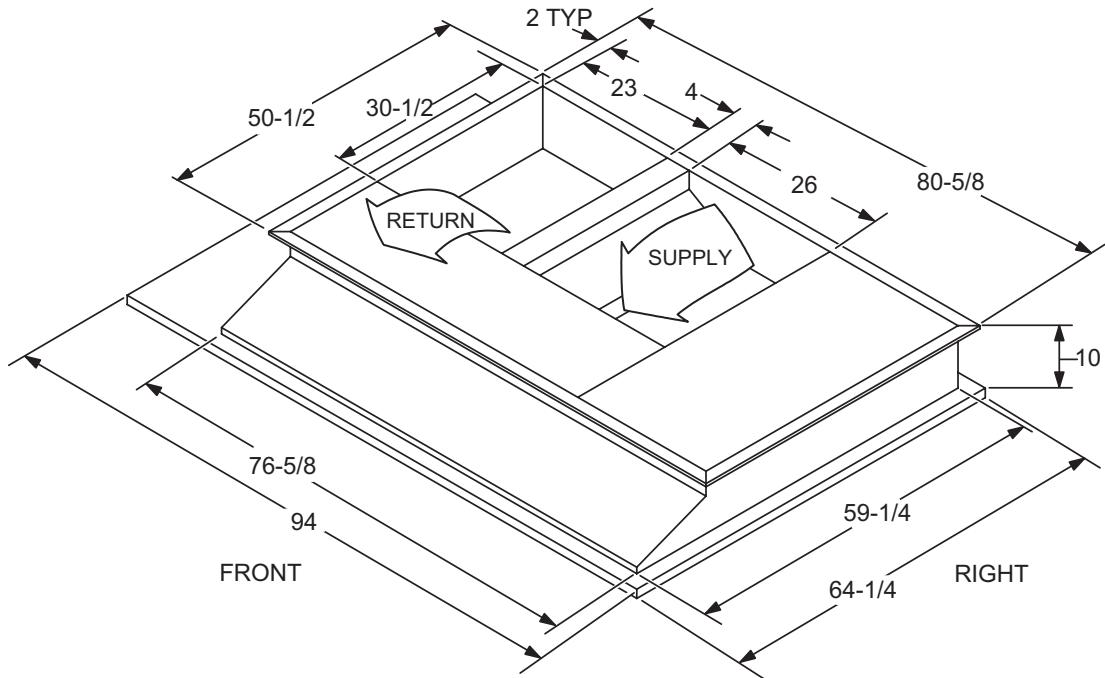


FIGURE 9 - SUNLINE™ TO PREDATOR® TRANSITION ROOF CURBS

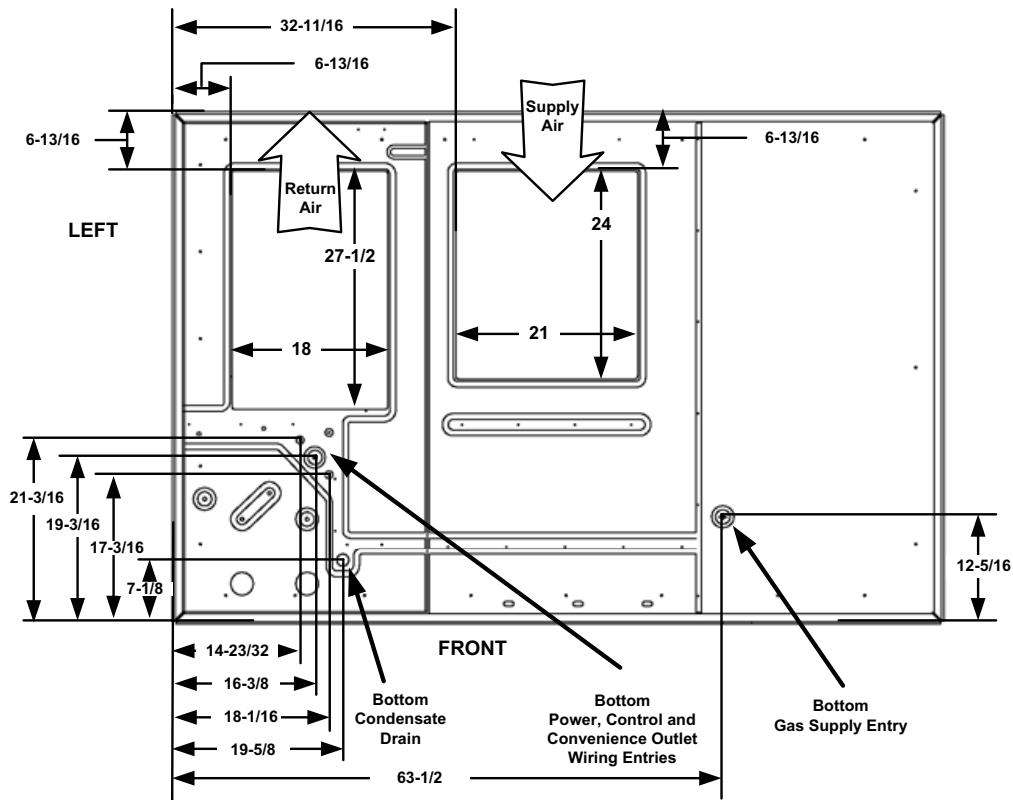


FIGURE 10 - BOTTOM DUCT OPENINGS (FROM ABOVE)

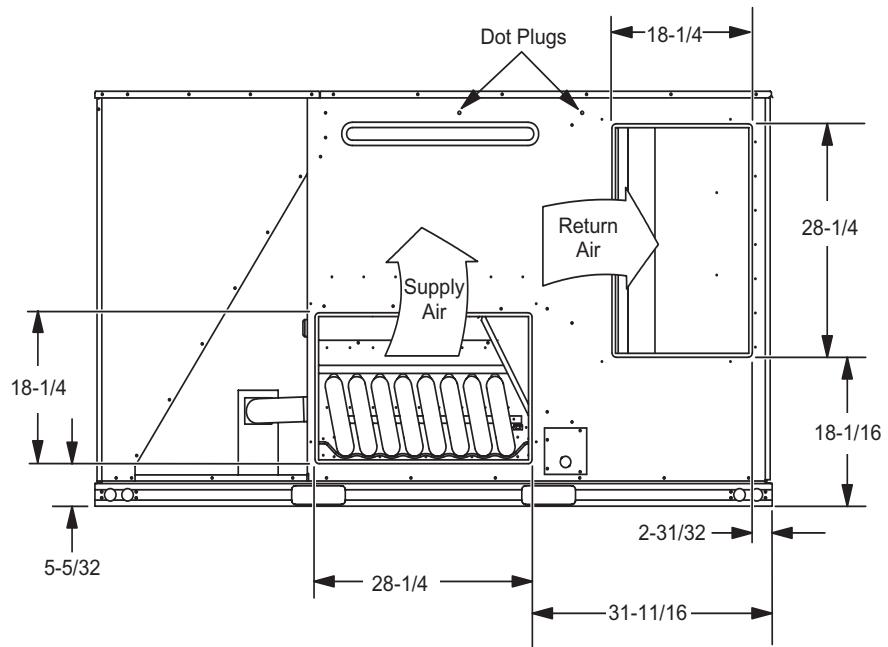


FIGURE 11 - REAR DUCT DIMENSIONS

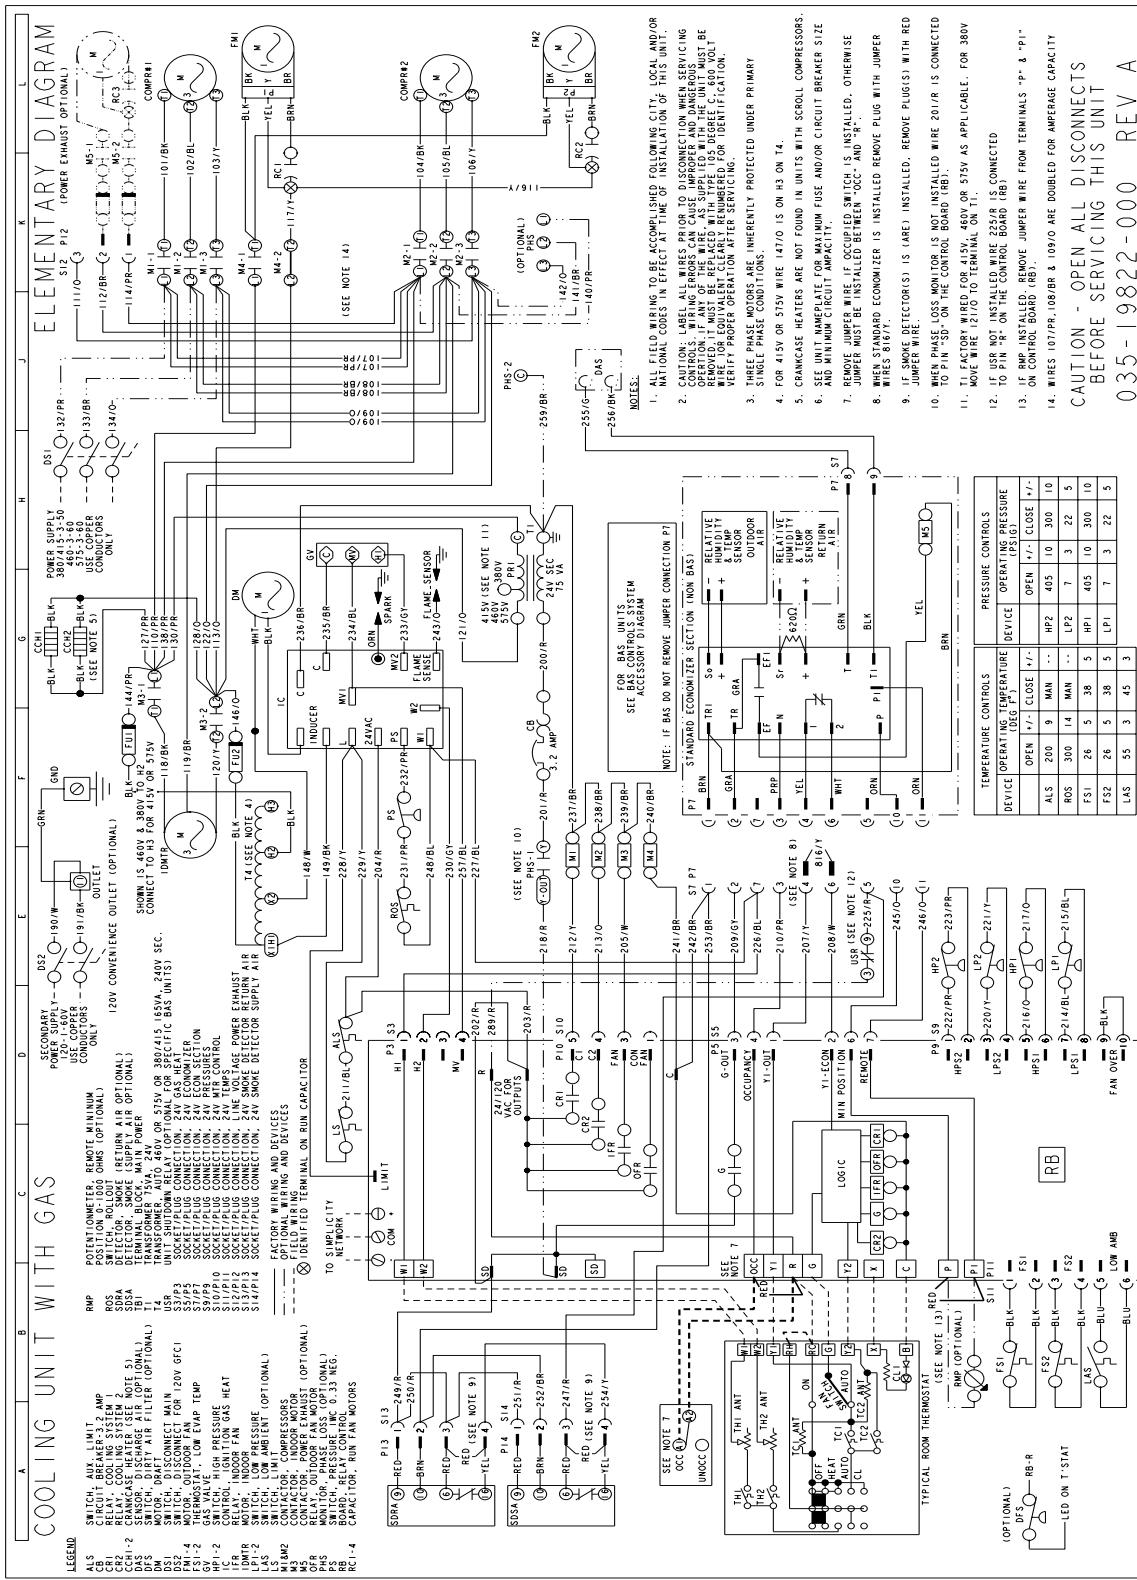


FIGURE 14 - COOLING UNIT WITH GAS HEAT WIRING 460, 575 VOLT AND 50 HZ DIAGRAM

GUIDE SPECIFICATIONS

PREDATOR®
DM 078, 090, 102, 120 & 150
9.0 EER

GENERAL

Units shall be manufactured by York International Unitary Products Group in an ISO 9001 certified facility. YORK® Predator® units are convertible single packages with a common footprint cabinet and common roof curb for all 6-1/2 through 12-1/2 ton models. All units have two compressors with independent refrigeration circuits to provide 2 stages of cooling. The units were designed for light commercial applications and can be easily installed on a roof curb, slab, or frame. All Predator® units are self-contained and assembled on rigid full perimeter base rails allowing for 3-way forklift access and overhead rigging. Every unit is completely charged, wired, piped, and tested at the factory to provide a quick and easy field installation. All units are convertible between side and down airflow. Independent economizer designs are used on side and down discharge applications, as well as all tonnage sizes. Predator® units are available in the following configurations: cooling only, cooling with electric heat, and cooling with gas heat. Electric heaters are available as factory-installed options and field-installed accessories.

DESCRIPTION

Units shall be factory assembled, single package, (Elec/Elec, Gas/Elec), designed for outdoor installation. Units shall have a minimum EER of 9.0. They shall have built in field convertible duct connections for down discharge supply/return or horizontal discharge supply/return and be available with factory installed options or field installed accessories. The units shall be factory wired, piped and charged with R-22 refrigerant and factory tested prior to shipment. All unit wiring shall be both numbered and color coded. The cooling performance shall be rated in accordance with DOE and ARI test procedures. Units shall be CSA certified to ANSI Z21.47 and UL 1995/CAN/CSA No. 236-M90 standards.

UNIT CABINET

Unit cabinet shall be constructed of G90 galvanized steel with exterior surfaces coated with a non-chalking, powder paint finish, certified at 750 hours salt spray test per ASTM-B117 standards. Indoor blower sections shall be insulated with up to 1" thick insulation coated on the airside. Aluminum foil faced insulation shall be used in the unit's compartments and be fastened to prevent insulation from entering the air stream. Cabinet doors shall be hinged with tool-less access for easy servicing and maintenance. Full perimeter base rails shall be provided to assure reliable transit of equipment, overhead rigging, fork truck access and proper sealing on roof curb applications. Disposable 2" filters shall be furnished and be accessible through hinged access door. Fan performance measuring ports shall be provided on the outside of the cabinet to allow accurate air measurements of evaporator

fan performance without removing panels or creating bypass of the coils. Condensate pan shall be slide out design, constructed of a non corrosive material, internally sloped and conforming to ASHRAE 62-B9 standards. Condensate connection shall be a minimum of $\frac{3}{4}$ " I.D. female and be rigid mount connection.

INDOOR (EVAPORATOR) FAN ASSEMBLY

Fan shall be a belt drive assembly and include an adjustable pitch motor pulley. Job site selected brake horsepower shall not exceed the motors nameplate horsepower rating plus the service factor. Units shall be designed to operate within the service factor. Fan wheel shall be double inlet type with forward curve blades, dynamically balanced to operate smoothly throughout the entire range of operation. Airflow design shall be constant volume. Bearings shall be sealed and permanently lubricated for longer life and no maintenance. Entire blower assembly and motor shall be slide out design.

OUTDOOR (CONDENSER) FAN ASSEMBLY

The outdoor fans shall be of the direct drive type, discharge air vertically, have aluminum blades riveted to corrosion resistant steel spider brackets and shall be dynamically balanced for smooth operation. The outdoor fan motors shall have permanently lubricated bearings internally protected against overload conditions and staged independently. A cleaning window shall be provided on two sides of the units for coil cleaning.

REFRIGERANT COMPONENTS

Compressors:

- A. Shall be fully hermetic type, direct drive, internally protected with internal high-pressure relief and over temperature protection. The hermetic motor shall be suction gas cooled and have a voltage range of + or - 10% of the unit nameplate voltage.
- B. Shall have internal spring isolation and sound muffling to minimize vibration and noise, and be externally isolated on a dedicated, independent mounting.

Coils:

- A. Evaporator and condenser coils shall have aluminum plate fins mechanically bonded to seamless internally enhanced copper tubes with all joints brazed. Special Phenolic coating shall be available as a factory option.
- B. Evaporator and condenser coils shall be of the direct expansion, draw-thru design.

Refrigerant Circuit and Refrigerant Safety Components shall include:

- A. Independent fixed-orifice or thermally operated expansion devices.
- B. Solid core filter drier(strainer to eliminate any moisture or foreign matter.
- C. Accessible service gage connections on both suction and discharge lines to charge, evacuate, and measure refrigerant pressure during any necessary servicing or troubleshooting, without losing charge.
- D. The unit shall have two independent refrigerant circuits, equally split in 50% capacity increments.

Unit Controls:

- A. Unit shall be complete with self-contained low-voltage control circuit protected by a resettable circuit breaker on the 24-volt transformer side.
- B. Unit shall incorporate a lockout circuit which provides reset capability at the space thermostat or base unit should any of the following standard safety devices trip and shut off compressor:
- C. Loss-of-charge/Low-pressure switch.
 - (1) High-pressure switch.
 - (2) Freeze-protection thermostat, evaporator coil. If any of the above safety devices trip, an LED (light-emitting diode) indicator shall flash a diagnostic code that indicates which safety switch has tripped.
- D. Unit shall incorporate "AUTO RESET" compressor over temperature, over current protection.
- E. Unit shall operate with conventional thermostat designs and have a low voltage terminal strip for easy hook-up.
- F. Unit control board shall have on-board diagnostics and fault code display.
- G. Standard controls shall include anti-short cycle and low voltage protection, and permit cooling operation down to 0 °F.
- H. Control board shall monitor each refrigerant safety switch independently.
- I. Control board shall retain last 5 fault codes in non-volatile memory, which will not be lost in the event of a power loss.

GAS HEATING SECTION (IF EQUIPPED)

Heat exchanger and exhaust system shall be constructed of aluminized steel and shall be designed with induced draft combustion with post purge logic, energy saving direct spark ignition, and redundant main gas valve. The heat exchanger shall be of the tubular type, constructed of T1-40 aluminized steel for corrosion resistance and allowing minimum mixed air entering temperature of 40 °F. Burners shall be of the in-

shot type, constructed of aluminum-coated steel. All gas piping shall enter the unit cabinet at a single location, through either the side or bottom, without any field modifications. An integrated control board shall provide timed control of evaporator fan functioning and burner ignition. Heating section shall be provided with the following minimum protection:

- A. Primary and auxiliary high-temperature limit switches.
- B. Induced draft pressure sensor.
- C. Flame roll out switch (manual reset).
- D. Flame proving controls. Unit shall have two independent stages of capacity (60% 1st stage, 100% 2nd stage).

ELECTRIC HEATING SECTION (IF EQUIPPED)

An electric heating section, with nickel chromium elements, shall be provided in a range of 9 thru 54 KW, offering two states of capacity all sizes. The heating section shall have a primary limit control(s) (automatic reset) to prevent the heating element system from operating at an excessive temperature. The Heating Section assembly shall slide out of the unit for easy maintenance and service. Units with Electric Heating Sections shall be wired for a single point power supply with branch circuit fusing (where required).

UNIT OPERATING CHARACTERISTICS

Unit shall be capable of starting and running at 125 °F outdoor temperature, exceeding maximum load criteria of ARI Standard 210/240. The compressor, with standard controls, shall be capable of operation down to 0 °F outdoor temperature. Unit shall be provided with fan time delay to prevent cold air delivery before heat exchanger warms up. (Gas heat only)

ELECTRICAL REQUIREMENTS - All unit power wiring shall enter unit cabinet at a single factory provided location and be capable of side or bottom entry to minimize roof penetrations and avoid unit field modifications. Separate side and bottom openings shall be provided for the control wiring.

STANDARD LIMITED WARRANTIES - Compressor – 5 Years, Heat Exchanger – 10 Years, Elect. Heat Elem. – 5 Years, Parts – 1 Year

FACTORY INSTALLED OPTIONAL OUTDOOR AIR (Shall be made available by either/or):

1. **ELECTRONIC ENTHALPY AUTOMATIC ECONOMIZER** – Outdoor and return air dampers that are interlocked and positioned by a fully-modulating, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in outdoor air to meet the minimum ventilation requirement of the conditioned space during normal operation. During economizer operation, a mixed-air temperature control shall modulate the

outdoor and return air damper assembly to prevent the supply air temperature from dropping below 55 °F. Changeover from compressor to economizer operation shall be provided by an integral electronic enthalpy control that feeds input into the basic module. The outdoor intake opening shall be covered with a rain hood that matches the exterior of the unit. Water eliminator/filters shall be provided. Simultaneous economizer/compressor operation is also possible. Dampers shall fully close on power loss. Available with barometric relief or power exhaust.

2. **MOTORIZED OUTDOOR AIR DAMPERS** – Outdoor and return air dampers that are interlocked and positioned by a 2-position, spring-return damper actuator. The maximum leakage rate for the outdoor air intake dampers shall not exceed 2% when dampers are fully closed and operating against a pressure differential of 0.5 IWG. A unit-mounted potentiometer shall be provided to adjust the outdoor and return air damper assembly to take in the design CFM of outdoor air to meet the ventilation requirements of the conditioned space during normal operation. Whenever the indoor fan motor is energized, the dampers open up to one of two pre-selected positions – regardless of the outdoor air enthalpy. Dampers return to the fully closed position when the indoor fan motor is de-energized. Dampers shall fully close on power loss.

ADDITIONAL FACTORY INSTALLED OPTIONS

- **ALTERNATE INDOOR BLOWER MOTOR** – For applications with high restrictions, units are available with optional indoor blower motors that provide higher static output and/or higher airflow.
- **CONVENIENCE OUTLET (POWERED/NON-POWERED)** – Unit can be provided with an optional 120VAC GFCI outlet with cover on the corner of the unit housing the compressors.
- **ELECTRIC HEAT** - Electric heaters range from 9 kW to 54 kW and are available in all the voltage options of the base unit.
- **PHASE MONITOR** - Designed to prevent damage in out-of-phase condition.

- **COIL GUARD** - Designed to prevent condenser coil damage.
- **BAS CONTROLS** - Include supply air sensor, return air sensor, dirty filter indicator and air proving switch.
- **DIRTY FILTER SWITCH** – This kit includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high-pressure drop across the filters.
- **BREAKER** – An HACR breaker can be factory installed on gas heat units or cooling units with electric heat.
- **DISCONNECT SWITCH** - A disconnect can be factory installed on a cooling only units sized for the largest electric heat available.
- **STAINLESS STEEL HEAT EXCHANGER** – For applications in a corrosive environment, this option provides a full stainless steel heat exchanger assembly.
- **STAINLESS STEEL DRAIN PAN** – Provides years of trouble-free operation in corrosive environments.
- **SMOKE DETECTOR** – A smoke detector can be factory mounted and wired in the supply and/or return air compartments.

OTHER PRE-ENGINEERED ACCESSORIES AVAILABLE

- **ROOF CURB** - 14" and 8" high, full perimeter knockdown curb, with hinged design for quick assembly.
- **BAROMETRIC RELIEF DAMPER** – (Unit mounted – Downflow, Duct Mounted – Horizontal) – Contains a rain hood, air inlet screen, exhaust damper and mounting hardware. Used to relieve internal air pressure through the unit during economizer operation.
- **PROPANE CONVERSION KIT** – Contains new orifices and gas valve springs to convert from natural to L.P. gas.
- **-60 °F GAS HEAT KIT** – Provides an electric heat kit for the gas compartment for use in extreme low ambient conditions.
- **ECONOMIZER** (Downflow and Horizontal flow)
- **POWER EXHAUST** – (Unit mount – Downflow, Duct mount – Horizontal flow)
- **DUAL ENTHALPY KIT** - Provides a second input to economizer to monitor return air.

Subject to change without notice. Printed in U.S.A.
Copyright © 2004 by Unitary Products. All rights reserved.

036-21058-005-A-0704
Supersedes: 036-21058-004-C-0504

**Unitary
Products
Group**

**5005
York
Drive**

**Norman
OK
73069**